

(12) **United States Patent**
Wen et al.

(10) **Patent No.:** **US 11,137,250 B2**
(45) **Date of Patent:** **Oct. 5, 2021**

(54) **COMB-DRIVEN SUBSTRATE DECOUPLED ANNULUS PITCH/ROLL BAW GYROSCOPE WITH SLANTED QUADRATURE TUNING ELECTRODE**

(71) Applicant: **Georgia Tech Research Corporation,**
Atlanta, GA (US)

(72) Inventors: **Haoran Wen,** Atlanta, GA (US);
Farrokh Ayazi, Atlanta, GA (US)

(73) Assignee: **Georgia Tech Research Corporation,**
Atlanta, GA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 558 days.

(21) Appl. No.: **15/771,453**

(22) PCT Filed: **Oct. 28, 2016**

(86) PCT No.: **PCT/US2016/059408**
§ 371 (c)(1),
(2) Date: **Apr. 27, 2018**

(87) PCT Pub. No.: **WO2017/075413**
PCT Pub. Date: **May 4, 2017**

(65) **Prior Publication Data**
US 2018/0321037 A1 Nov. 8, 2018

Related U.S. Application Data

(60) Provisional application No. 62/349,700, filed on Jun. 14, 2016, provisional application No. 62/247,267, filed on Oct. 28, 2015.

(51) **Int. Cl.**
G01C 19/5684 (2012.01)
G01C 19/5677 (2012.01)
G01C 19/5698 (2012.01)

(52) **U.S. Cl.**
CPC **G01C 19/5698** (2013.01); **B81B 2201/033** (2013.01); **B81B 2203/0136** (2013.01); **G01C 19/5677** (2013.01); **G01C 19/5684** (2013.01)

(58) **Field of Classification Search**
CPC **B81B 2201/033**; **B81B 2203/0136**; **G01C 19/5698**; **G01C 19/5677**; **G01C 19/5684**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,548,178 A 8/1996 Eda et al.
6,889,550 B2* 5/2005 Beitia G01C 19/5684
73/504.04

(Continued)

FOREIGN PATENT DOCUMENTS

WO 2015063727 5/2015
WO 2016201413 12/2016

OTHER PUBLICATIONS

Acar et al. "Post-Release Capacitance Enhancement in Micromachined Devices" Proceedings of IEEE Sensors 2004 1:268-271 (Oct. 2004).

(Continued)

Primary Examiner — Jill E Culler


Assistant Examiner — Ruben C Parco, Jr.

(74) *Attorney, Agent, or Firm* — Myers Bigel, P.A.

(57) **ABSTRACT**

A bulk acoustic wave resonator apparatus includes a resonator member, at least one anchor structure coupling the resonator member to a substrate, and a comb-drive element connected to the resonator member. The comb-drive element includes first comb fingers protruding from the resonator member, and second comb fingers of a different material than the first comb fingers interdigitated with the first comb fingers to define sub-micron capacitive gaps therebetween. Respective sidewalls of the first comb fingers are oppositely-tapered relative to respective sidewalls of the second comb fingers along respective lengths thereof, such that operation

(Continued)

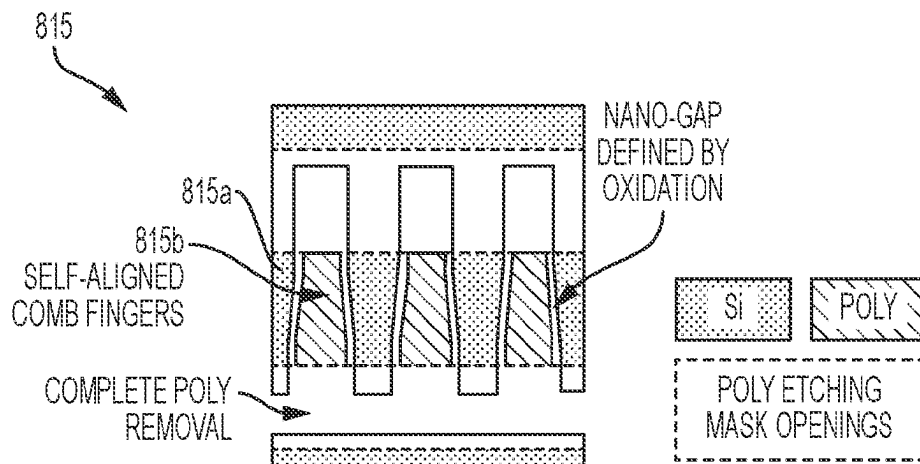

of the comb-drive element varies the sub-micron capacitive gaps at the respective sidewalls thereof. Related devices and fabrication methods are also discussed.

25 Claims, 12 Drawing Sheets

(56)

References Cited

U.S. PATENT DOCUMENTS

8,166,816	B2	5/2012	Ayazi et al.	
8,763,441	B2	7/2014	Casinovi et al.	
2002/0083777	A1	7/2002	Mochida	
2002/0180563	A1	12/2002	Ma et al.	
2005/0248238	A1	11/2005	Yamada et al.	
2006/0091978	A1	5/2006	Wang et al.	
2006/0225504	A1	10/2006	Ayazi et al.	
2007/0222011	A1	9/2007	Robert et al.	
2009/0095079	A1	4/2009	Ayazi	
2010/0251818	A1	10/2010	Ge et al.	
2011/0298564	A1	12/2011	Iwashita et al.	
2013/0009716	A1 *	1/2013	Phan Le	H03H 9/2431 331/154
2013/0283911	A1	10/2013	Ayazi et al.	
2014/0197502	A1 *	7/2014	Dehe	B81C 1/00968 257/416
2014/0230549	A1 *	8/2014	McNeil	G01C 19/5684 73/504.13
2015/0021722	A1 *	1/2015	Dehe	H01L 21/30604 257/416
2015/0377624	A1 *	12/2015	Falorni	G01C 19/5712 73/504.12
2016/0204716	A1 *	7/2016	Suzuki	B81B 3/0054 359/230
2016/0268927	A1 *	9/2016	Liu	B81B 3/0086
2016/0327390	A1 *	11/2016	Serrano	G01C 19/5698
2016/0332872	A1 *	11/2016	Iihola	B81C 1/00595
2017/0067742	A1 *	3/2017	Zotov	G01P 15/02
2017/0170801	A1	6/2017	Tajic et al.	

OTHER PUBLICATIONS

Ayazi et al. "High Aspect-Ratio Combined Poly and Single-Crystal Silicon (HARPSS) MEMS Technology" *Journal of Microelectromechanical Systems* 9(3):288-294 (Sep. 2000).

Ayazi, Farrokh "Multi-DOF inertial MEMS: From gaming to dead reckoning" 2011 16th International Solid-State Sensors, Actuators and Microsystems Conference (pp. 2805-2808) (Jun. 2011).

Jensen et al. "Shaped Comb Fingers for Tailored Electromechanical Restoring Force" *Journal of Microelectromechanical Systems* 12(3):373-383 (Jun. 2003).

Kaajakari et al. "Nonlinear Limits for Single-Crystal Silicon Microresonators" *Journal of Microelectromechanical Systems* 13(5):715-724 (Oct. 2004).

Notification of Transmittal of the International Search Report and the Written Opinion of the International Searching Authority, or the Declaration, in corresponding PCT Application No. PCT/US2016/059408 (11 pages) (dated Dec. 29, 2016).

Pourkamali et al. "Low-impedance VHF and UHF Capacitive Silicon Bulk Acoustic Wave Resonators—Part I: Concept and Fabrication" *IEEE Transactions on Electron Devices* 54(8):2017-2023 (Aug. 2007).

Pourkamali et al. "Low-Impedance VHF and UHF Capacitive Silicon Bulk Acoustic-Wave Resonators—Part II: Measurement and Characterization" *IEEE Transactions on Electron Devices* 54(8):2024-2030 (Aug. 2007).

Rosa et al. "Enhanced electrostatic force generation capability of angled comb finger design used in electrostatic comb-drive actuators" *Electronics Letters* 34(18):1787-1788 (Sep. 1998).

Shahmohammadi et al. "Nonlinearity Reduction in Silicon Resonators by Doping and Re-Orientation" 2013 IEEE 26th International Conference on Micro Electro Mechanical Systems (MEMS) (pp. 793-796) (Jan. 2013).

Shirazi et al. "Combined Phase-Readout and Self-Calibration of MEMS Gyroscopes" 2013 Transducers & Eurosensors XXVII: The 17th International Conference on Solid-State Sensors, Actuators and Microsystems (Transducers & Eurosensors XXVII) (pp. 960-963) (Jun. 2013).

Sung et al. "A mode-matched 0.9 Mhz single proof-mass dual-axis gyroscope" 2011 16th International Solid-State Sensors, Actuators and Microsystems Conference (pp. 2821-2824) (Jun. 2011).

Wen et al. "HARPSS-Fabricated Nano-Gap Comb-Drive for Efficient Linear Actuation of High Frequency BAW Resonators" 2016 IEEE 29th International Conference on Micro Electro Mechanical Systems (MEMS) (pp. 1014-1017) (Jan. 2016).

Yang et al. "Measurement of the Nonlinear Elasticity of Doped Bulk-mode MEMS Resonators" *Solid-State Sensors, Actuators and Microsystems Workshop* (pp. 285-288) (Jun. 2014).

Ye et al. "Optimal Shape Design of an Electrostatic Comb Drive in Microelectromechanical Systems" *Journal of Microelectromechanical Systems* 7(1):16-26 (Mar. 1998).

* cited by examiner

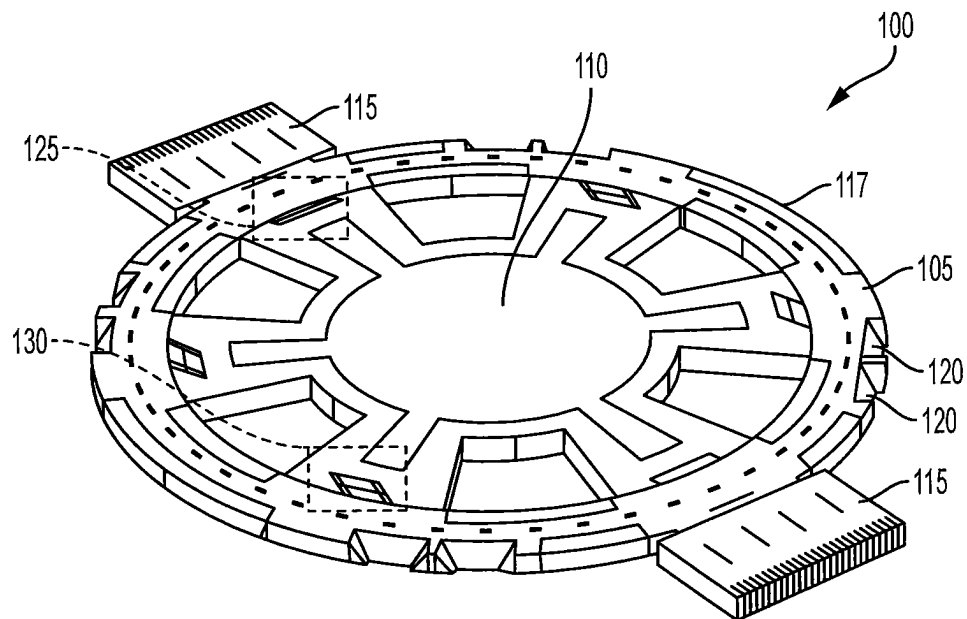


FIG. 1A

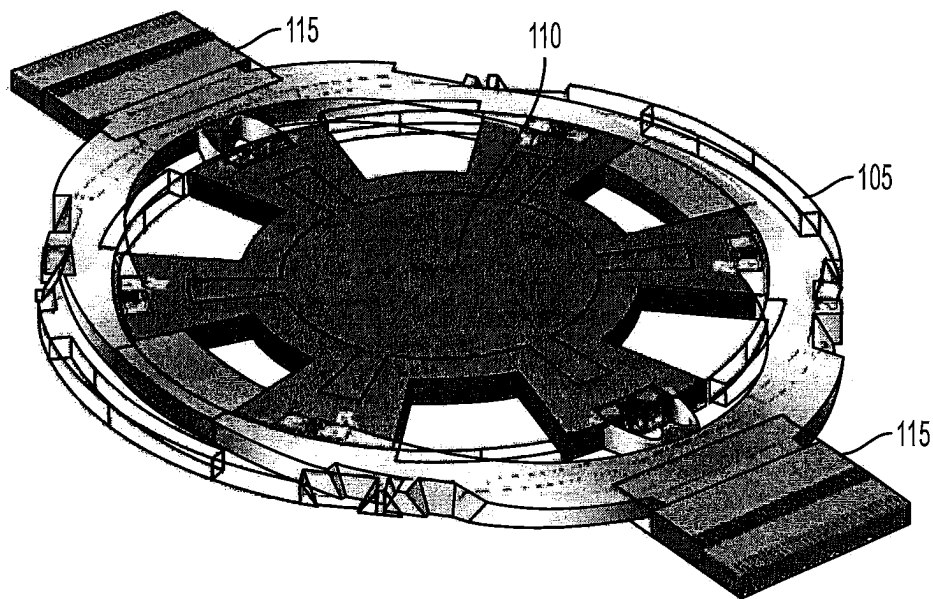


FIG. 1B

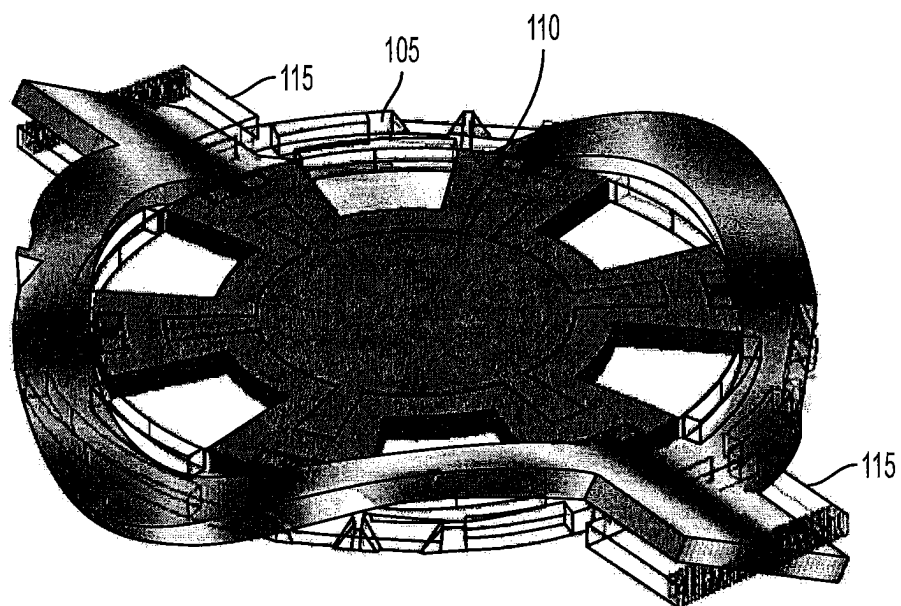


FIG. 1C

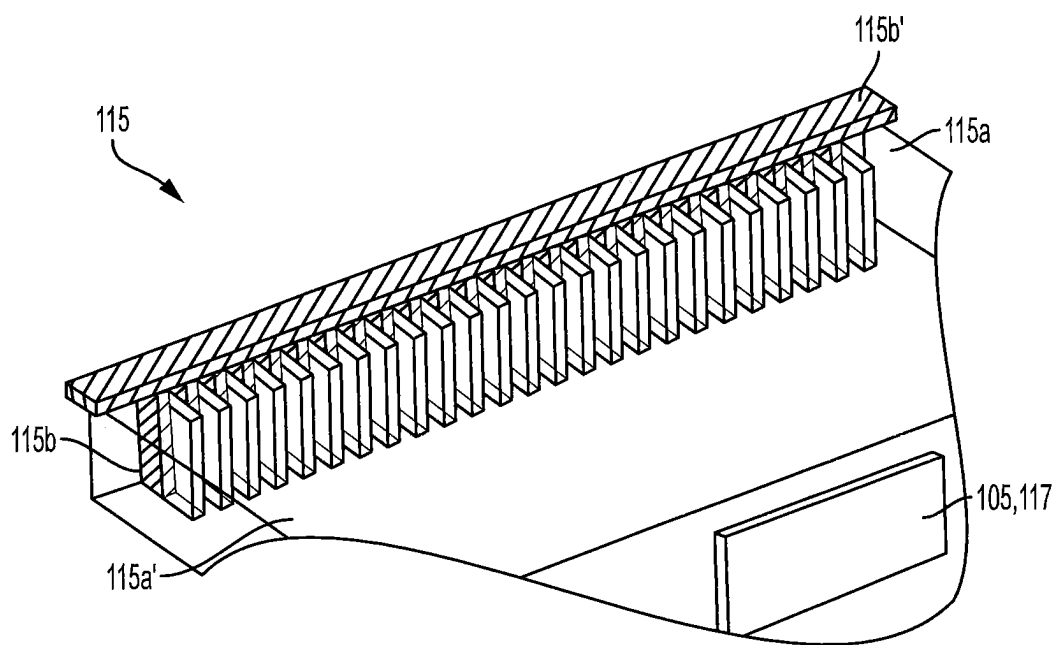


FIG. 2

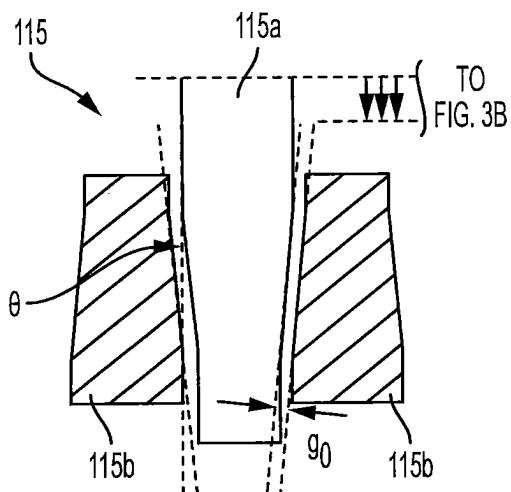


FIG. 3A

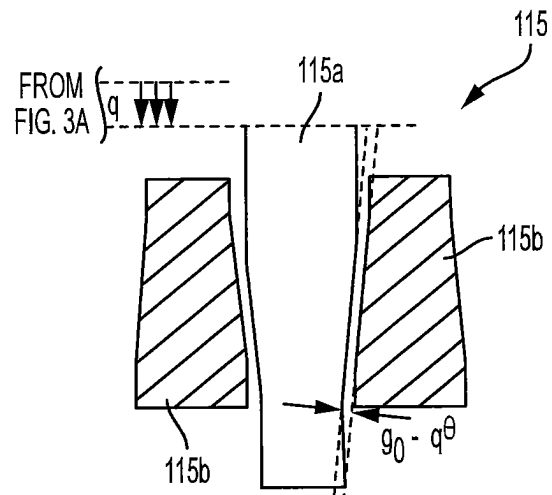


FIG. 3B

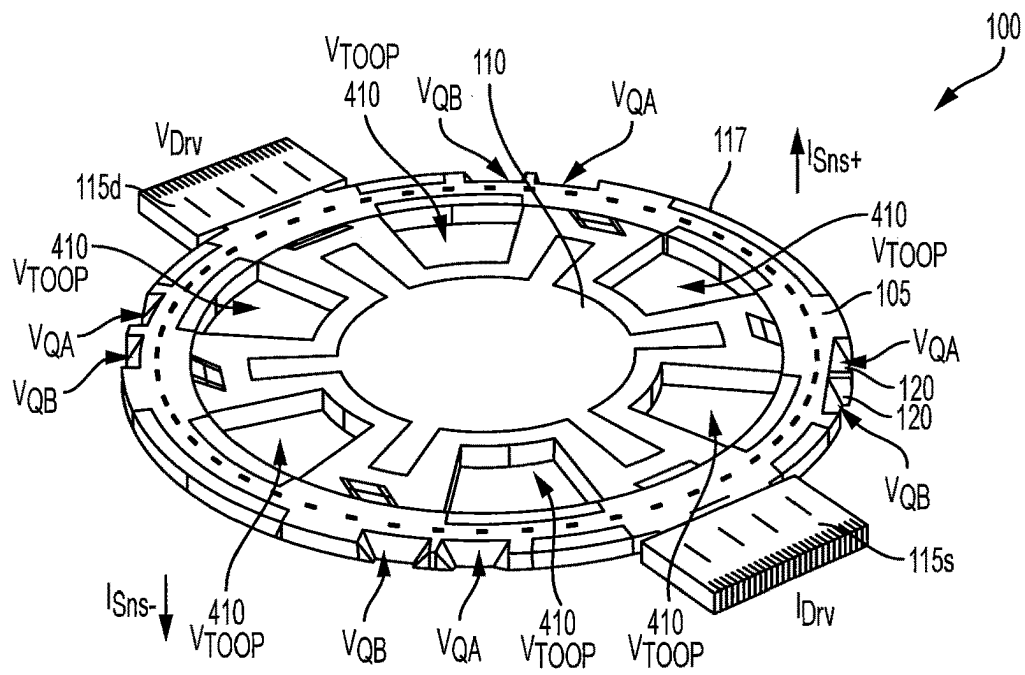


FIG. 4A

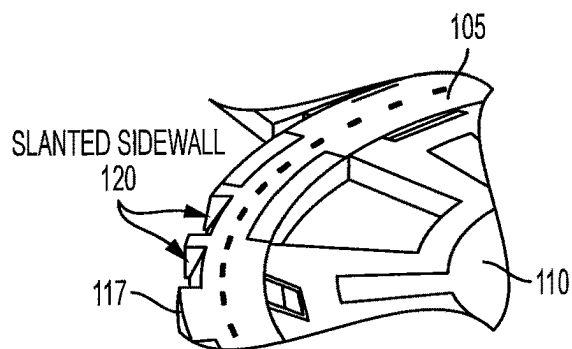


FIG. 4B

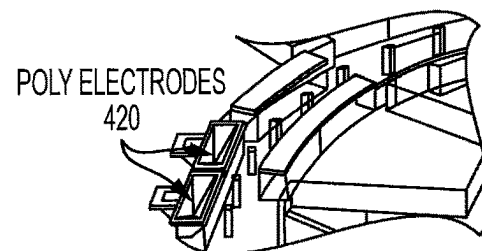


FIG. 4C

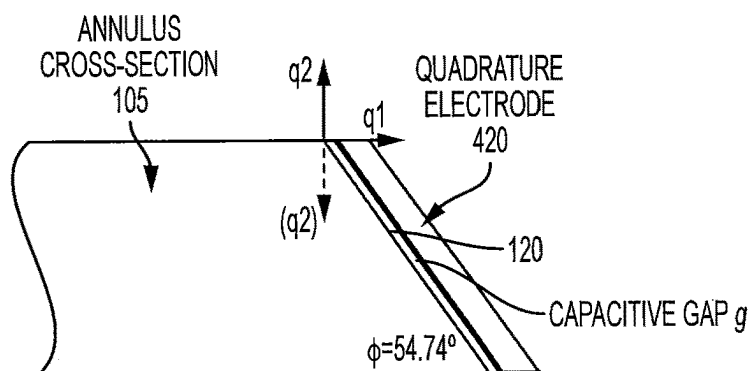


FIG. 4D

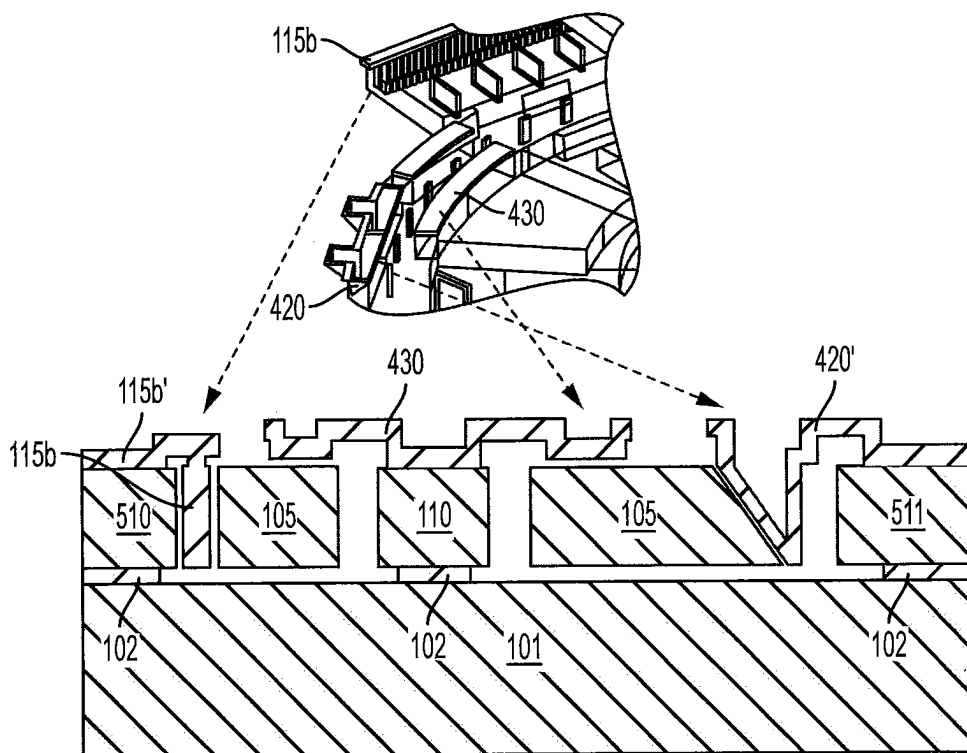
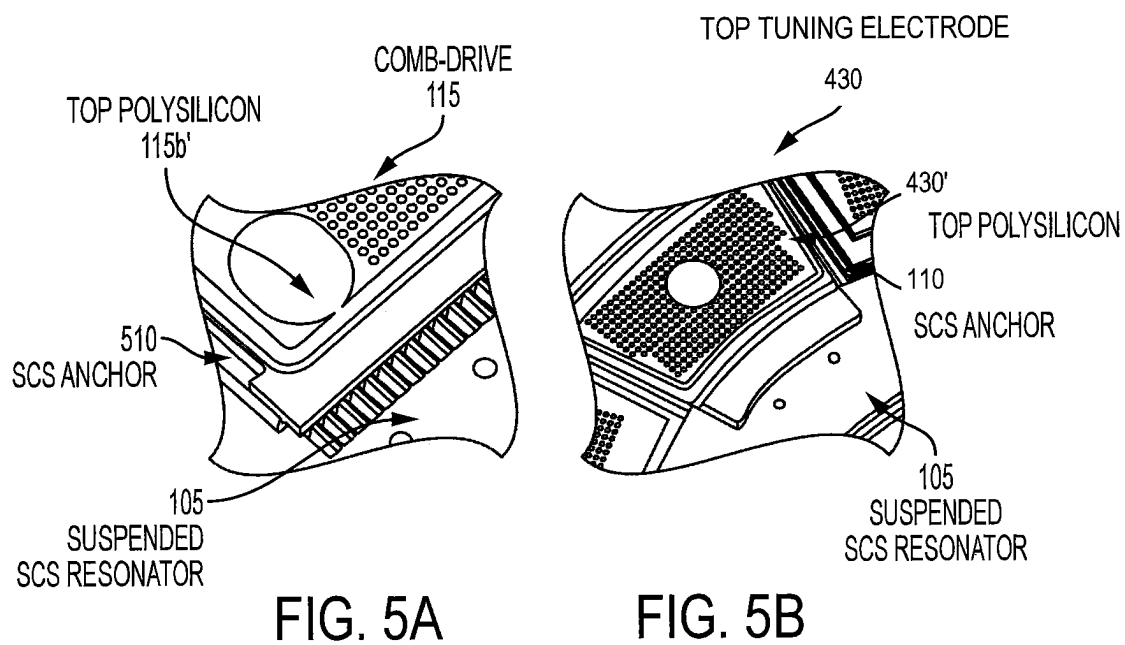


FIG. 5C

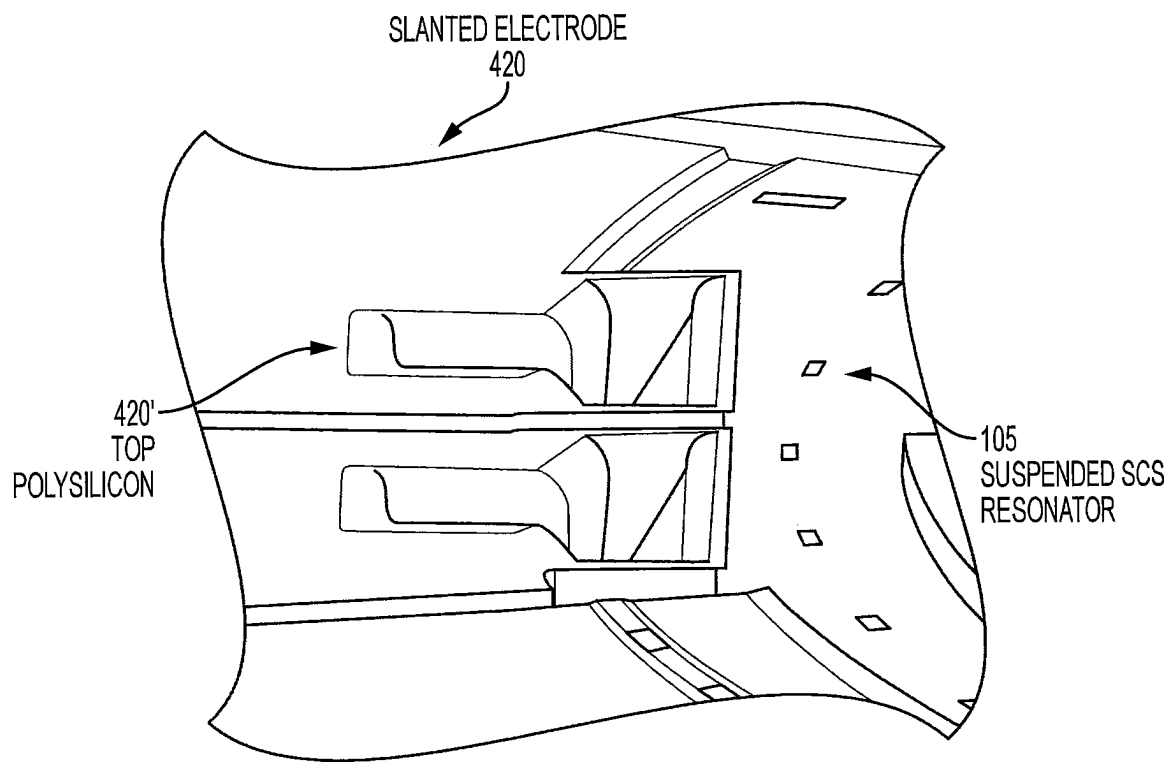


FIG. 5D

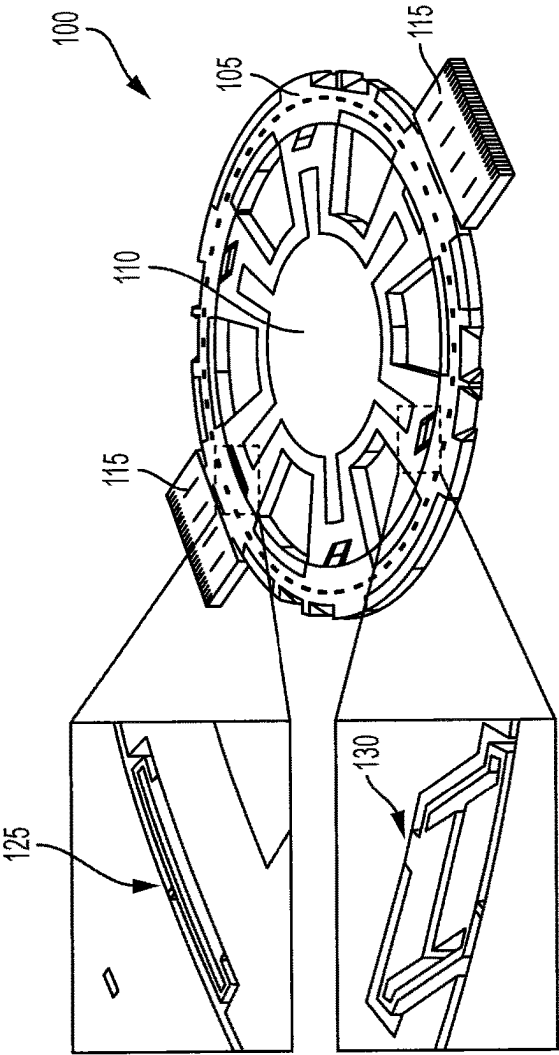


FIG. 6A

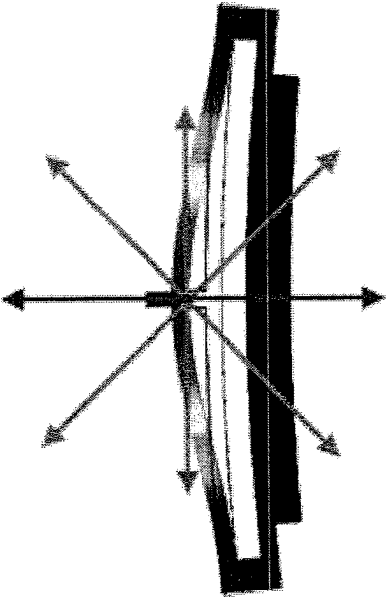


FIG. 6B

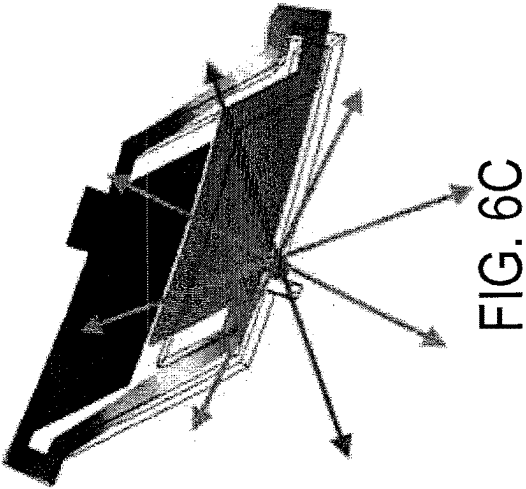


FIG. 6C

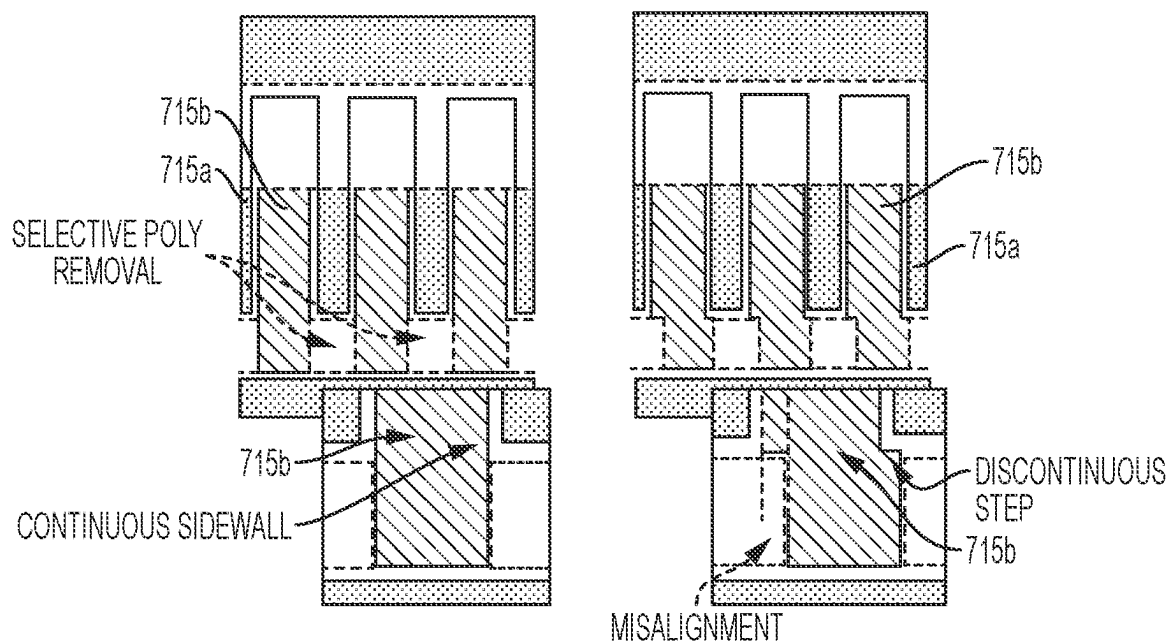


FIG. 7A
(Prior Art)

FIG. 7B
(Prior Art)

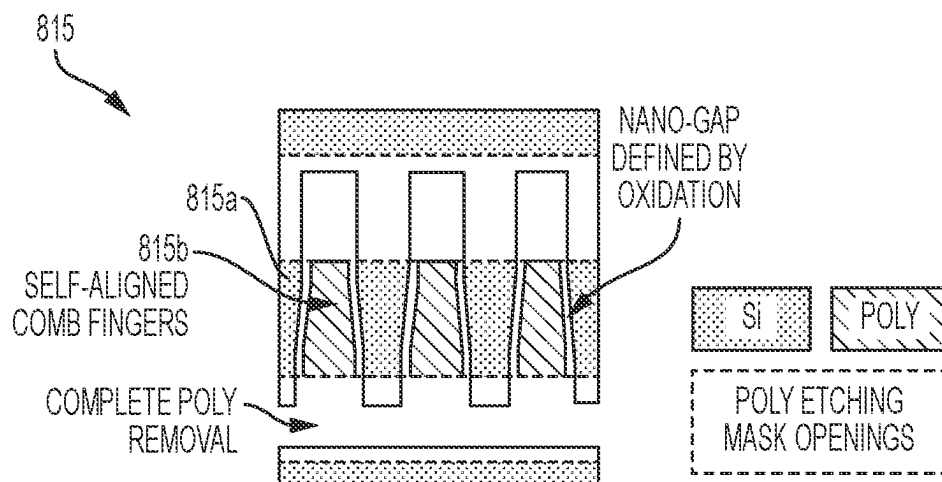


FIG. 8

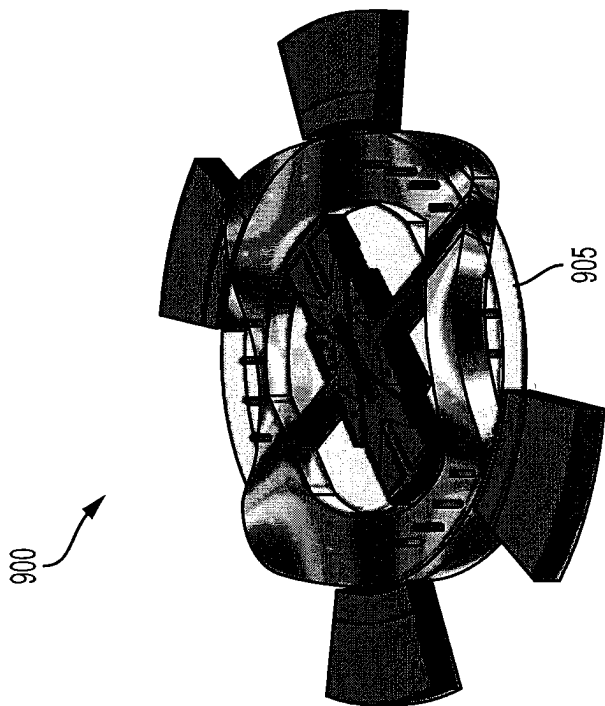


FIG. 9A

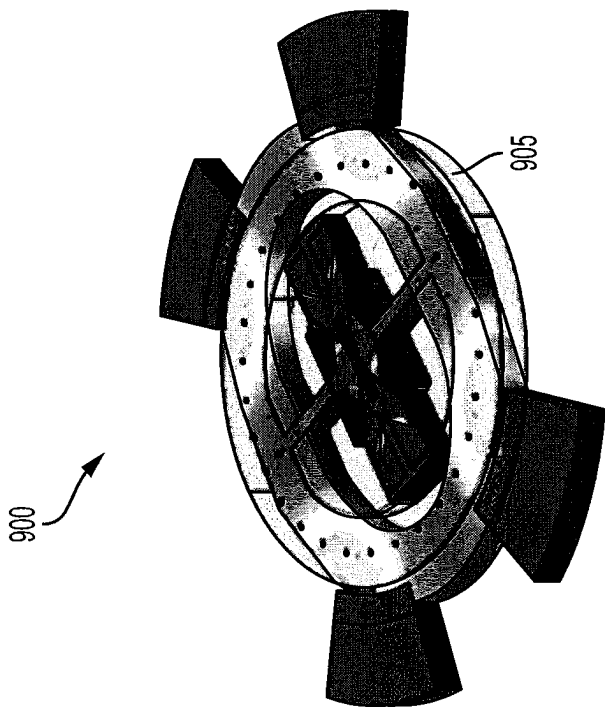


FIG. 9B

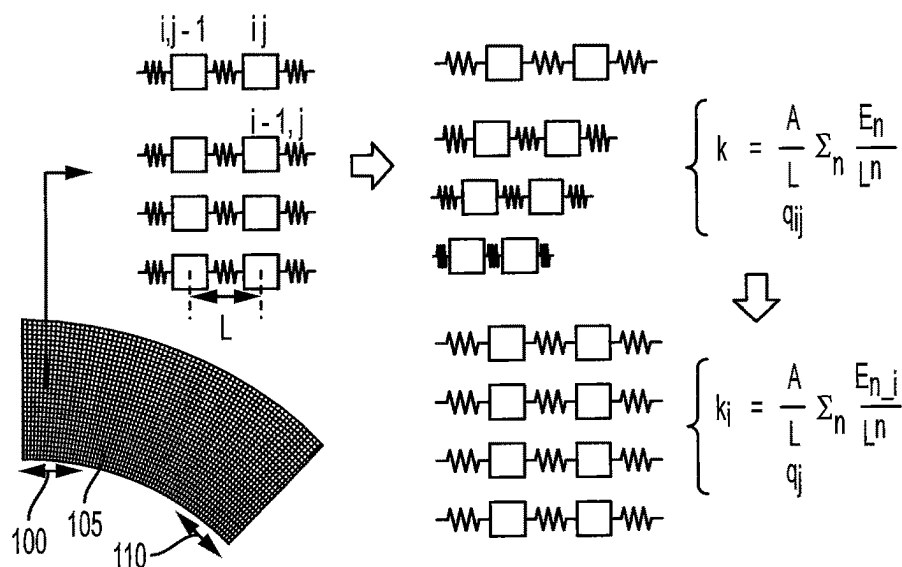


FIG. 10




FIG. 11A




FIG. 11B




FIG. 11C




FIG. 11D




FIG. 11E




FIG. 11F





FIG. 11G



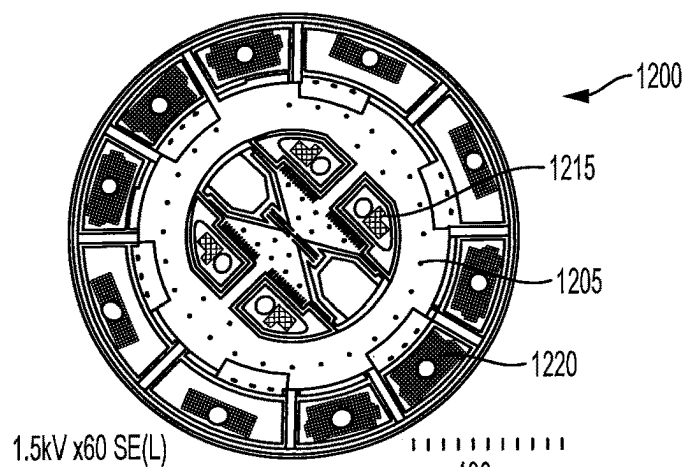


FIG. 12A

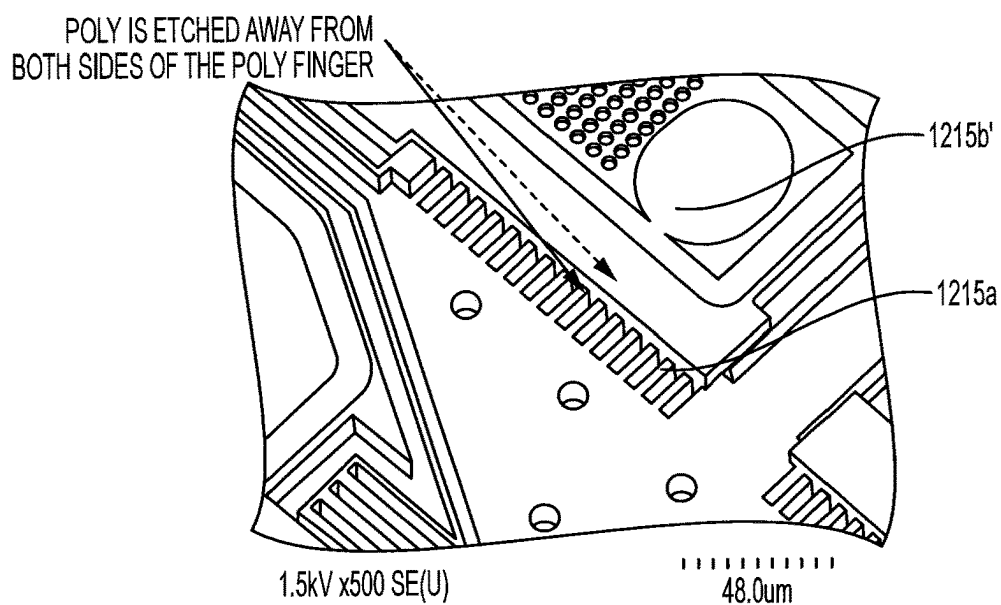


FIG. 12B

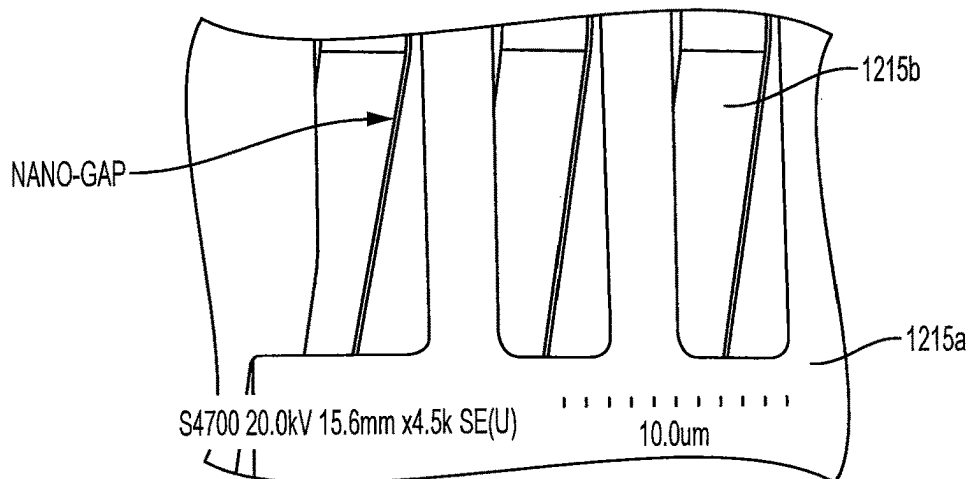


FIG. 12C

1

**COMB-DRIVEN SUBSTRATE DECOUPLED
ANNULUS PITCH/ROLL BAW GYROSCOPE
WITH SLANTED QUADRATURE TUNING
ELECTRODE**

CLAIM OF PRIORITY

This application is a 35 U.S.C. § 371 national phase application of PCT Application Serial No. PCT/US2016/059408, filed Oct. 28, 2016, which claims priority from U.S. Provisional Patent Application No. 62/247,267 entitled “COMB-DRIVEN SUBSTRATE DECOUPLED ANNULUS PITCH/ROLL BAW GYROSCOPE WITH SLANTED QUADRATURE TUNING ELECTRODE” and filed Oct. 28, 2015, in the United States Patent and Trademark Office, the disclosure of each of which is incorporated by reference herein in its entirety. This application also claims priority from U.S. Provisional Patent Application No. 62/349,700 entitled “FABRICATION METHOD FOR SLANTED ELECTRODES IN SINGLE-CRYSTAL SILICON MEMS DEVICES” and filed Jun. 14, 2016, in the United States Patent and Trademark Office, the disclosure of which is incorporated by reference herein in its entirety.

STATEMENT OF GOVERNMENT INTEREST

The subject matter disclosed herein was funded in-part by the Defense Advanced Research Projects Agency Microsystems Technology Office, Single-Chip Timing and Inertial Measurement Unit (TIMU) program, Project No. 2106CDD, under Contract No. N66001-11-C-4176. The U.S. government may have rights in the present disclosure.

FIELD

The present disclosure relates to MEMS (Micro-electro-mechanical systems), and more particularly, to MEMS resonators and related operation and fabrication techniques.

BACKGROUND

Micro-electromechanical system (MEMS) resonators can provide small form factor, ease of integration with conventional semiconductor fabrication techniques and high f-Q products. High frequency and high-Q width-extensional mode silicon bulk acoustic resonators (SiBARs) and film bulk acoustic resonators (FBARs) have demonstrated atmospheric Q factors in excess of 10,000 at or above 100 MHz, with moderate motional resistances. Bulk acoustic wave (BAW) refers to a mode of vibration that extends throughout a bulk portion of a resonator element or member. Movement of the resonator element towards a sense electrode changes the capacitive gap spacing therebetween, thereby altering the resonant frequency of the device. Such BAW resonators are described in the publication “*Low-impedance VHF and UHF Capacitive Silicon Bulk Acoustic Wave Resonators—Part I: Concept and Fabrication*” to S. Pourkamali et al., IEEE Trans. On Electron Devices, Vol. 54, No. 8, pp. 2017-2023, August 2007, the disclosure of which is incorporated herein by reference in its entirety.

Tri-axial gyroscopes are a type of MEMS resonator that may be increasingly used in handheld devices, such as smart user interfaces and gaming controllers that may require multi-dimensional motion recognition for accurate positioning. Some tri-axial gyroscopes are described in the publication “*MULTI-DOF INERTIAL MEMS: FROM GAMING TO DEAD RECKONING*” to F. Ayazi, Digest Tech. Papers

2

Transducers’ 11 Conference, Beijing, China, pp. 2805-2808, 2011, the disclosure of which is incorporated herein by reference in its entirety.

While some conventional vibratory gyroscopes utilize separate proof masses for each axis’ rate measurement, some gyroscopes may employ a single proof-mass for simultaneous dual-axis pitch and roll rate sensing (i.e., x- and y-axis), and may be formed, for example, using a revised version of the high-aspect-ratio polysilicon and single-crystal silicon (HARPSS)TM process. Such single-proof mass gyroscopes are described in the publication “*A MODE-MATCHED 0.9 MHZ SINGLE PROOF-MASS DUAL-AXIS GYROSCOPE*” to W. K. Sung, et al., Digest Tech. Papers Transducers’ 11 Conference, pp. 2821-2824, 2011, the disclosure of which is incorporated herein by reference in its entirety. The HARPSSTM process is further described in the publication “*High Aspect-Ratio Combined Poly and Single-Crystal Silicon (HARPSS) MEMS Technology*” to F. Ayazi and K. Najafi, J. Microelectromech. Syst., Vol. 9, pp. 288-294, 2000, the disclosure of which is incorporated herein by reference in its entirety. High-aspect-ratio polysilicon and single-crystal silicon (HARPSS)-on-silicon-on-insulator (SOI) silicon bulk acoustic-wave resonators are also described in the publication “*Low-Impedance VHF and UHF Capacitive Silicon Bulk Acoustic-Wave Resonators—Part II: Measurement and Characterization*” to S. Pourkamali, et al., Transactions on Electron Devices, Vol. 54, pp. 2024-2030, 2007, the disclosure of which is incorporated herein by reference in its entirety.

BAW gyroscopes are further described in U.S. Pat. No. 8,166,816 to Ayazi et al., entitled “*BULK ACOUSTIC WAVE GYROSCOPE*” issued May 1, 2012, the disclosure of which is incorporated herein by reference in its entirety. A self-calibration mechanism, which relies on application of a rotating electrostatic field to first and second drive electrodes simultaneously to excite both the drive and sense resonance modes of the gyroscope (and thus does not require physical rotation of the resonant body of the gyroscope) is described in U.S. Pat. No. 8,763,441 to Casinovi et al., entitled “*METHOD AND APPARATUS FOR SELF-CALIBRATION OF GYROSCOPES*” issued Jul. 1, 2014, and Shirazi, et al., “*Combined Phase-Readout and Self-Calibration of MEMS Gyroscopes*,” Digest Tech. Papers Transducers 2013 Conference, Barcelona, Spain, pp. 960-963, 2013, the disclosures of which are incorporated herein by reference in their entireties.

SUMMARY

According to some embodiments, a bulk acoustic wave resonator apparatus includes a resonator member, at least one anchor structure coupling the resonator member to a substrate, and a comb-drive element connected to the resonator member. The comb-drive element includes first comb fingers protruding from the resonator member, and second comb fingers interdigitated with the first comb fingers to define sub-micron capacitive gaps therebetween.

In some embodiments, the first comb fingers include a different material than the second comb fingers.

In some embodiments, respective sidewalls of the second comb fingers are oppositely-tapered relative to respective sidewalls of the first comb fingers along respective lengths between opposing thereof, such that operation of the comb-drive element varies or reduces the sub-micron capacitive gaps at the respective sidewalls of the first and second comb fingers.

In some embodiments, the respective sidewalls of the first comb and second comb fingers are tapered at an angle relative to respective lengths thereof such that a linear drive range of the comb-drive element exceeds a mechanical non-linearity limit of the resonator member.

In some embodiments, the resonator member is an annulus, and the angle is in a range of about 1 degree to about 10 degrees, or in a range of about 1 degree to about 5 degrees.

In some embodiments, the second comb fingers are free of connection to one another at either of the opposing ends thereof.

In some embodiments, the first comb fingers are longer than the second comb fingers along respective lengths between the opposing ends thereof, and the second comb fingers are confined within trenches defined by the respective sidewalls of the first comb fingers.

In some embodiments, the second comb fingers are self-aligned within the trenches defined by the respective sidewalls of the first comb fingers.

In some embodiments, the first comb fingers are single-crystal silicon.

In some embodiments, the second comb fingers are polysilicon.

In some embodiments, a polysilicon layer connects the second comb fingers at respective surfaces thereof opposite the substrate such that the polysilicon layer and the second comb fingers define a unitary member.

In some embodiments, the polysilicon layer is coupled to the substrate by a single crystal silicon anchor.

In some embodiments, the resonator member is single-crystal silicon, and the first comb fingers are connected at one of the opposing ends thereof adjacent a perimeter of the resonator member such that the resonator member and the first comb fingers define a unitary member.

In some embodiments, the sub-micron capacitive gaps are between about 100 nanometers (nm) and 500 nm.

In some embodiments, a resonance frequency of the apparatus is greater than about 300 kilohertz (kHz).

In some embodiments, the apparatus is a gyroscope.

In some embodiments, the gyroscope is a pitch/roll gyroscope.

In some embodiments, the resonator member is an annulus.

In some embodiments, the comb-drive element is connected to a perimeter of the annulus at an anti-nodal point for an in-plane drive mode thereof, where movement of the resonator member in the in-plane drive mode is parallel to a plane defined by a surface of the substrate.

In some embodiments, the comb-drive element is a first comb-drive element. The apparatus further includes a second comb-drive element connected to the perimeter of the annulus at a location opposite to the first comb-drive element. The first comb-drive element is a drive electrode configured to actuate the resonator member, and the second comb-drive element is a sense electrode configured to detect movement of the resonator member.

In some embodiments, the apparatus is configured to utilize an in-plane drive mode, a first orthogonal out-of-plane sense mode orthogonal to the in-plane drive mode, and a second orthogonal out-of-plane sense mode orthogonal to the first orthogonal out-of-plane sense mode and the in-plane drive mode.

In some embodiments, a perimeter of the resonator member is at least partially defined by respective sidewalls that are slanted at an angle relative to a plane defined by a surface of the resonator member.

In some embodiments, the resonator member is single crystal silicon. The angle is defined by a (111) crystal plane of the single-crystal silicon resonator member to be about 54.7 degrees.

In some embodiments, respective tuning electrodes are disposed adjacent the respective sidewalls and/or a top surface of the resonator member and are separated therefrom by respective capacitive gaps. Portions of the respective tuning electrodes are slanted at respective angles parallel to the angle of the respective sidewalls of the resonator member to define the respective capacitive gaps.

In some embodiments, the tuning electrodes are positioned along the perimeter of the annulus at spacings of approximately 90 degrees.

In some embodiments, the tuning electrodes are positioned along the perimeter of the annulus between nodal points for the in-plane drive mode thereof and an out-of-plane sense mode thereof.

In some embodiments, the respective tuning electrodes are quadrature cancellation electrodes. Responsive to application of a quadrature tuning voltage thereto, the respective tuning electrodes are configured to produce a corresponding electrostatic force that provides a torque in a direction between an in-plane direction that is parallel to a surface of the substrate and an out-of-plane direction that is orthogonal to the in-plane direction.

In some embodiments, responsive to application of a quadrature tuning voltage to the respective tuning electrodes, a frequency of an in-plane drive mode of the resonator member and a frequency of an out-of-plane sense mode of the resonator member, which is orthogonal to the in-plane drive mode, are mode-matched. That is, the resonant member may be operated at a mode-matched condition in which the resonance frequencies for an in-plane drive mode and at least one out-of-plane sense mode are located at a specific frequency.

In some embodiments, the at least one anchor structure includes respective anchor structures coupling the resonator member to the substrate at different locations of the resonator member. Respective tether structures couple the respective anchor structures to the resonator member at the different locations thereof, where ones of the respective tether structures at the different locations of the resonator member have different shapes.

In some embodiments, the respective tether structures are coupled to the resonator member at respective nodal points for an out-of-plane sense mode thereof, where movement of the resonator member in the out-of-plane sense mode is non-parallel to a plane defined by a surface of the substrate.

In some embodiments, the different shapes are configured to confine movement of portions of the resonator member to coincide with local deformations corresponding to an in-plane drive mode, where movement of the resonator member in the in-plane drive mode is parallel to a plane defined by a surface of the substrate.

In some embodiments, the resonator member is an annulus, the respective anchor structures and tether structures are positioned within an interior of the annulus at the different locations relative to the comb-drive element, and the respective anchor structures are coupled to one another by a disk-shaped member.

According to further embodiments, a method of fabricating a bulk acoustic wave resonator apparatus includes forming a comb-drive element connected to a resonator member. The comb-drive element includes first comb fingers protruding from the resonator member, and second comb fingers

5

interdigitated with the first comb fingers to define sub-micron capacitive gaps therebetween.

In some embodiments, forming the comb-drive element includes forming the first comb fingers of a first material, and forming the second comb fingers of a second material different from the first material.

In some embodiments, forming the comb-drive element includes forming respective sidewalls of the second comb fingers oppositely-tapered relative to respective sidewalls of the first comb fingers between opposing ends thereof such that operation of the comb-drive element varies the sub-micron capacitive gaps at the respective sidewalls of the first and second comb fingers.

In some embodiments, the respective sidewalls of the first comb and second comb fingers are formed tapered at an angle relative to respective lengths thereof such that a linear drive range of the comb-drive element exceeds a mechanical non-linearity limit of the resonator member.

In some embodiments, the resonator member is an annulus, and wherein the angle is in a range of about 1 degree to about 10 degrees, or in a range of about 1 degree to about 5 degrees.

In some embodiments, forming the comb-drive element includes forming the second comb fingers free of connection to one another at either of the opposing ends thereof.

In some embodiments, the first comb fingers are longer than the second comb fingers along respective lengths between the opposing ends thereof, and the second comb fingers are formed to be confined within trenches defined by the respective sidewalls of the first comb fingers.

In some embodiments, forming the second comb fingers includes forming an oxide layer along the respective sidewalls of the first comb fingers of the first material defining the trenches, forming the second comb fingers of the second material within the trenches such that the opposing ends thereof are not connected, and removing the oxide layer such that the second comb fingers are self-aligned within the trenches.

In some embodiments, the first material is single-crystal silicon.

In some embodiments, the second material is polysilicon.

In some embodiments, a polysilicon layer is formed connecting the second comb fingers at respective surfaces thereof opposite the substrate such that the polysilicon layer and the second comb fingers define a unitary member.

According to still further embodiments, a bulk acoustic wave pitch/roll gyroscope having a resonance frequency of greater than about 300 kilohertz (kHz) includes an annulus-shaped resonator member, respective anchor structures coupling the annulus-shaped resonator member to a substrate, and a comb-drive element connected to the annulus-shaped resonator member. The comb-drive element includes first comb fingers protruding from the annulus-shaped resonator member, and second comb fingers of a different material than the first comb fingers interdigitated therewith to define capacitive gaps of less than about 500 nanometers (nm) therebetween. Respective sidewalls of the second comb fingers are oppositely-tapered relative to respective sidewalls of the first comb fingers between opposing ends thereof such that operation of the comb-drive element varies the capacitive gaps therebetween.

In some embodiments, a perimeter of the annulus-shaped resonator member is at least partially defined by respective sidewalls that are slanted at an angle relative to a plane defined by a surface of the resonator member. The gyroscope further includes respective tuning electrodes, which are slanted at respective angles parallel to the angle of the

6

respective sidewalls of the annulus-shaped resonator member and separated therefrom by respective capacitive gaps. The respective tuning electrodes are configured to provide quadrature tuning between different resonance modes of the annulus-shaped resonator member.

Other apparatus and/or methods according to some embodiments will become apparent to one with skill in the art upon review of the following drawings and detailed description. It is intended that all such additional embodiments, in addition to any and all combinations of the above embodiments, be included within this description, be within the scope of the invention, and be protected by the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a perspective view illustrating an annulus pitch/roll BAW gyroscope including a sub-micron capacitive gap comb-drive in accordance with some embodiments of the present disclosure.

FIGS. 1B and 1C are perspective views illustrating displacement of an annulus resonator member in a drive mode and a sense mode, respectively, during operation of an annulus pitch/roll BAW gyroscope including a sub-micron capacitive gap comb-drive in accordance with some embodiments of the present disclosure.

FIG. 2 is a perspective view illustrating interdigitated comb fingers of a sub-micron capacitive gap comb-drive in accordance with some embodiments of the present disclosure.

FIGS. 3A and 3B are plan view cross-sections illustrating interdigitated comb fingers and related operation of a sub-micron capacitive gap comb-drive in accordance with some embodiments of the present disclosure.

FIG. 4A is a perspective view illustrating areas for electrode placement in an annulus pitch/roll BAW gyroscope in accordance with some embodiments of the present disclosure.

FIG. 4B is an enlarged perspective view illustrating slanted sidewall portions of an annulus resonator member in accordance with some embodiments of the present disclosure.

FIG. 4C is an enlarged perspective view illustrating tuning electrodes and placement in an annulus resonator member in accordance with some embodiments of the present disclosure.

FIG. 4D is a partial cross-section illustrating slanted sidewall mating surfaces of an annulus resonator member and a tuning electrode in an annulus pitch/roll BAW gyroscope in accordance with some embodiments of the present disclosure.

FIGS. 5A, 5B, and 5D are plan view scanning electron microscope (SEM) images illustrating a sub-micron capacitive gap comb-drive, a top tuning electrode, and a slanted tuning electrode, respectively, in accordance with some embodiments of the present disclosure.

FIG. 5C is a cross-section illustrating attachment of a sub-micron capacitive gap comb-drive, annulus resonator member, top tuning/sensing electrodes, and a slanted tuning electrode to a substrate in an annulus pitch/roll BAW gyroscope in accordance with some embodiments of the present disclosure.

FIG. 6A is a perspective view illustrating locally-engineered tether structures that couple an annulus resonator member to a central anchor structure in an annulus pitch/roll BAW gyroscope in accordance with some embodiments of the present disclosure.

FIGS. 6B and 6C are enlarged views illustrating deformation and displacement of the different locally-engineered tether structures of FIG. 6A.

FIGS. 7A and 7B are plan views illustrating some conventional comb-drive elements and related fabrication techniques.

FIG. 8 is a plan view illustrating a sub-micron comb-drive element and related fabrication techniques in accordance with some embodiments of the present disclosure.

FIGS. 9A and 9B are perspective views illustrating displacement of an annulus resonator member in a drive mode and a sense mode, respectively, of an annulus pitch/roll BAW gyroscope including a sub-micron capacitive gap comb-drive in accordance with some embodiments of the present disclosure.

FIG. 10 illustrates an equivalent model of an annulus resonator member in accordance with some embodiments of the present disclosure.

FIGS. 11A-11G are perspective views illustrating example operations for fabricating self-aligned interdigitated comb fingers of a comb-drive element using a HARPSS™ fabrication process in accordance with some embodiments of the present disclosure.

FIGS. 12A, 12B, and 12C are scanning electron microscope (SEM) images illustrating a plan view of a comb-drive annulus BAW resonator, an enlarged view of the comb-drive structure, and an enlarged view of the interdigitated comb fingers and nano-gap of the comb-drive annulus BAW resonator, respectively, in accordance with some embodiments of the present disclosure.

DETAILED DESCRIPTION

Example embodiments of the present disclosure are directed to bulk acoustic wave (BAW) resonators actuated by sub-micron comb-drive elements, with particular embodiments directed to a substrate-decoupled annulus BAW pitch/roll gyroscope design with HARPSS™ fabricated nano-gap comb-drive structures and slanted sidewall electrodes. Such embodiments can improve performance of BAW resonators with respect to actuation range and quadrature error. While described primarily herein by way of example with reference to annulus pitch/roll BAW gyroscopes, it will be understood that the inventive concepts of the present disclosure are not so limited. More generally, embodiments of the present disclosure are applicable to any BAW resonator or inertial measurement apparatus that include drive electrodes, sense electrodes, tuning electrodes, and/or tether structures.

Inertial-grade MEMS gyroscope, especially pitch/roll gyroscope, is highly desired but not available in current market. Mode-matched annulus BAW gyroscope is a promising candidate for inertial-grade pitch/roll gyroscope due to its robustness and excellent vibration resistance. However, performance of annulus BAW gyroscopes may be limited by actuation range and fabrication imperfections.

FIG. 1A is a perspective view illustrating a bulk acoustic wave (BAW) resonator apparatus 100, shown as an annulus pitch/roll BAW gyroscope, in accordance with some embodiments of the present disclosure. As shown in FIG. 1A, the bulk acoustic wave resonator apparatus 100 includes a resonator member 105, shown as an annulus, and an anchor structure 110 suspending the resonator member 105 over a substrate. The anchor structure 110 is shown as a disk-shaped unitary member that is coupled to the resonator member 105 at six locations within an interior of the annulus by way of example, but it will be understood that embodi-

ments of the present disclosure may include multiple anchor structures and/or fewer or additional couplings to the interior and/or exterior of the resonator member. The BAW gyroscope 100 may have a resonance frequency of greater than 300 kHz, and in some embodiments, about 1 MHz or more. Additional features of annulus gyroscopes are described in U.S. Patent Application Publication No. 2013/0283911 entitled "MODE-MATCHED SINGLE PROOF-MASS DUAL-AXIS GYROSCOPE AND METHOD OF FABRICATION" to Ayazi, et al., the disclosure of which is incorporated by reference herein in its entirety.

Still referring to FIG. 1A, the BAW resonator apparatus 100 further includes comb-drive elements 115 connected to the resonator member 105 at a perimeter or edge 117 of the resonator member 105. The perimeter 117 of the resonator member 105 is at least partially defined by respective sidewalls 120 that are slanted at an angle relative to a plane defined by a surface of the resonator member 105. The anchor structure 110 is coupled to the resonator member 105 by respective tether structures 125, 130. The tether structures 125, 130 have different shapes at different locations of the interior of the resonator member 105 relative to the comb-drive elements 115.

FIGS. 1B and 1C are perspective views illustrating displacement of an annulus resonator member 105 in a drive mode and a sense mode, respectively, during operation of an annulus pitch/roll BAW gyroscope apparatus 100 including a sub-micron capacitive gap comb-drive 115 in accordance with some embodiments of the present disclosure. As shown in FIGS. 1B and 1C, the apparatus 100 uses $m=2$ in-plane mode as the drive mode (FIG. 1B) and $m=3$ out-of-plane mode as the sense mode (FIG. 1C). Two comb-drive elements 115 are connected to the annulus resonator member 105 at the anti-nodal point of the drive mode. In some embodiments, a drive amplitude that is more than ten times greater than some conventional annulus gyroscope may be used. Since the mechanical noise level is inverse proportional to the drive amplitude, an annulus pitch/roll BAW gyroscope apparatus 100 including a sub-micron capacitive gap comb-drive 115 in accordance with some embodiments of the present disclosure may achieve significantly higher performance than some conventional annulus gyroscopes. In order to achieve the larger drive amplitude with linear transduction and reasonable motional impedance, a HARPSS™-fabricated sub-micron comb-drive 115 is used to actuate the BAW gyroscope 100, as described in greater detail below.

FIG. 2 is a perspective view of a translucent geometry model illustrating the positions of interdigitated heterogeneous comb fingers of a sub-micron capacitive gap comb-drive element in accordance with some embodiments of the present disclosure. The sub-micron capacitive gap comb-drive element of FIG. 2 represents one of the sub-micron capacitive gap comb-drive elements 115 of FIG. 1. As shown in FIG. 2, the sub-micron capacitive gap comb-drive element 115 (also referred to herein as a nano-gap comb-drive) includes first comb fingers 115a protruding away from the perimeter 117 of the resonator member 105, and second comb fingers 115b interdigitated with the first comb fingers 115a to define sub-micron capacitive gaps therebetween. The sub-micron capacitive gaps may be about 100 nanometers (nm) to about 500 nm in some embodiments. The first comb fingers 115a are formed from or otherwise include a different material composition than the second comb fingers 115b. When HARPSS™-fabricated, the first comb fingers 115a are formed from single-crystal silicon, while the second comb fingers 115b are formed from poly-

silicon. The first comb fingers **115a** are continuously connected to one another at respective ends thereof **115a'** adjacent the perimeter **117** of the resonator member **105**. In some embodiments, the first comb fingers **115a** integrally extend from the perimeter of the resonator member **105** to define a unitary member. The second comb fingers **115b** are not connected to one another at either of the opposing ends thereof, but rather, are connected by a polysilicon layer **115b'** at respective surfaces thereof opposite the substrate. In some embodiments, the polysilicon layer **115b'** and the second comb fingers **115b** define a unitary member.

FIGS. 3A and 3B are plan view cross-sections illustrating interdigitated heterogeneous comb fingers and a gap-closing operation of the sub-micron capacitive gap comb-drive **115** of FIG. 2 in accordance with some embodiments of the present disclosure. As shown in FIGS. 3A and 3B, respective sidewalls of the interdigitated heterogeneous comb fingers **115a**, **115b** include tapered portions (illustrated as extending along the dotted lines). In particular, the respective sidewalls of the first comb fingers **115a** are oppositely-tapered relative to respective sidewalls of the second comb fingers **115b**. That is, the respective sidewalls of the first comb fingers **115a** are tapered in a complementary manner (e.g., at a vertically-opposite angle) relative to the respective sidewalls of the second comb fingers **115b** of a different material, such that the first comb fingers **115a** and the second comb fingers **115b** are configured to mate or accept one another when interdigitated. As such, operation of the comb-drive element **115** (illustrated as linear displacement q) varies or reduces the sub-micron capacitive gaps (from g_0 in FIG. 3A to $g_0 - (q \text{ times } \theta)$ in FIG. 3B) at the respective sidewalls of the first and second comb fingers **115a**, **115b**, where θ represents the tapering angle (relative to a direction along a length of a non-tapered or rectangular comb finger). Such a gap-closing operation (instead of an overlapping area changing operation) is used to eliminate lithography dependency and achieve self-aligned comb-fingers **115a**, **115b**, where the set of shorter tapered polysilicon fingers **115b** lie completely within trenches defined by the sidewalls of the set of longer single-crystal silicon fingers **115a**, where the relative lengths of the heterogeneous comb fingers **115a**, **115b** are along a direction in which the sidewalls thereof extend. With a predetermined tapering angle θ , the nano-gap comb-drive **115** can provide actuation forces similar to a HARPSS™-fabricated parallel-plate, but with a larger linear drive range. The electrostatic force $F_{\text{electrostatic}}$ and the linear drive range q_{linear} are given by equations (1) below. In some embodiments, the tapering angle θ of the first comb fingers **115a** and the second comb fingers **115b** (which is defined relative to a direction along the lengths thereof) is selected or otherwise configured such that the linear drive range of the comb-drive element **115** can exceed the mechanical non-linearity limit of the resonator member **105**.

The mechanical nonlinearity of BAW resonators can depend on the mode shape and doping level, and may be different for different resonator members. For high frequency BAW resonator, large mechanical nonlinearity is typically seen with amplitude in the order of a few hundred nanometers. The tapering angle is determined based on the desired amplitude and gap size according to the equations (1) provided below, where the actuation force is inversely proportional to the gap size. The tapering angle θ can thus be configured based on actuation force and linear drive/actuation range requirements. In some embodiments, for an annulus-type BAW resonator such as the BAW gyroscope **100**, the tapering angle θ may be in a range of about 1 degree to about 5 degrees. In other embodiments, for an annulus-

type BAW resonator such as the BAW gyroscope **900** discussed below with reference to FIGS. 9A and 9B, the tapering angle θ may be in a range of about 1 degree to about 10 degrees.

FIG. 4A is a perspective view illustrating electrode configurations in the bulk acoustic wave (BAW) resonator apparatus **100** of FIG. 1A, again shown as an annulus pitch/roll BAW gyroscope, in accordance with some embodiments of the present disclosure. As shown in FIG. 4A, the annulus resonator member **105** is configured for placement of respective electrodes at various positions within the interior of the annulus and around the perimeter of the annulus to provide drive, sense, and tuning functions. In particular, in FIG. 4A, the apparatus **100** includes two comb-drive elements **115d**, **115s**. The first comb-drive element **115d** is a drive or excitation electrode configured to be applied with a drive voltage V_{Drv} to actuate the resonator member **105**, and the second comb-drive element **115s** is a sense or monitor electrode configured to output a current I_{Drv} (corresponding to the in-plane drive mode), a current $I_{\text{Sns+}}$ (corresponding to a first out-of-plane sense mode that is orthogonal to the in-plane drive mode), and a current $I_{\text{Sns-}}$ (corresponding to a second out-of-plane sense mode that is orthogonal to the first out-of-plane sense mode and the in-plane drive mode), from which displacement of the resonator member **105** can be determined. Respective tuning electrodes, which are configured to be applied with out-of-plane tuning voltages V_{TOOP} , are provided in the hollow internal sections **410** defined between the anchor structure **110** and the annulus resonator member **105**. Tuning electrodes that are configured to be applied with quadrature error cancellation voltages V_{QA} , V_{QB} are provided at sidewalls **120** of the perimeter **117**, which are slanted at an angle relative to a plane defined by a surface of the resonator member **105**.

FIG. 4B is an enlarged perspective view illustrating the slanted sidewall portions **120** of the annulus resonator member **105**, while FIG. 4C is an enlarged perspective view illustrating the tuning electrodes and placement in the annulus resonator member **105**, in accordance with some embodiments of the present disclosure. As shown in FIG. 4B, the perimeter **117** of the resonator member **105** is at least partially defined by respective sidewalls **120** that are slanted at an angle relative to a plane defined by a surface of the resonator member **105**. As shown in FIG. 4C, respective tuning electrodes **420** are disposed adjacent the respective sidewalls **120** of the resonator member **105**. The tuning electrodes may be polysilicon in some embodiments. The tuning electrodes **420** have sidewalls that are slanted at the same angle as (and thus, adapted to mate with) the sidewalls **120** of the resonator member **105**. As shown in FIG. 4A, pairs of the tuning electrodes **420** (configured to be applied with voltages V_{QA} , V_{QB}) are separated from one another by approximately 90 degrees around the circumference of the annulus resonator member **105**. In some embodiments, the tuning electrodes **420** are positioned in between the nodal points of the in-plane and out-of-plane modes.

FIG. 4D is a partial cross-section illustrating the slanted sidewall mating surfaces of the annulus resonator member **105** and a tuning electrode **420** in an annulus pitch/roll BAW gyroscope **100** in accordance with some embodiments of the present disclosure. As shown in FIG. 4D, a sidewall portion of the tuning electrode **420** is slanted at the same angle ϕ as the sidewall **120** of the resonator member **105** such that the slanted tuning electrode **420** and the slanted sidewall **120** of the annulus resonator member **105** are separated by a uniform capacitive gap g . Voltages V_{QA} , V_{QB} may be applied

11

to the tuning electrodes **420** to provide quadrature error cancellation. In particular, in annulus BAW gyroscopes, imperfections like DRIE trench tilting can cause cross-coupling between in-plane and out-of-plane modes (quadrature), which can prevent mode-matching and can degrade noise performance. Some embodiments of the present disclosure may implement slanted sidewalls **120** and slanted electrodes **420** used for quadrature error cancellation. The slanted sidewalls **120** are located at the circumference **117** of the annulus resonator member **105**. In some embodiments, the slanted sidewalls **120** are fabricated by a post-DRIE anisotropic silicon wet etching. The gap size of the capacitive gap g between the slanted sidewalls **120** of the annulus **105** and the slanted sidewalls of the electrode **420** is selected or otherwise configured based on both in-plane and out-of-plane motion, which can allow for quadrature tuning.

Still referring to FIG. 4D, the angle ϕ of the slanted sidewall **120** may be about 30° to about 60° , for example, 45° . The angle ϕ of the slanted sidewall **120** is defined by the (111) crystal plane (relative to the (100) crystal plane) to be about 54.7° in some embodiments. This angle may be achieved, for example, by using a wet etching process that is selective to the (111) crystal plane. For an applied quadrature tuning voltage V_{QA} , V_{QB} , the tuning electrodes **420** are configured to produce a corresponding electrostatic force, which produces a torque in-between the in-plane and out-of-plane direction. This aligns each mode to the proper displacement plane, thus reducing or eliminating quadrature in some embodiments. Responsive to application of predetermined tuning voltages V_{TOOP} and quadrature cancellation voltages V_{QA} , V_{QB} , the frequency of the in-plane drive mode, the first orthogonal out-of-plane sense mode, and/or the second orthogonal out-of-plane sense can be mode-matched, and the cross-coupling noise between in-plane and out-of-plane modes can be reduced or minimized. Additional features of slanted quadrature error cancellation electrodes are described in PCT/2016/37186 entitled "MEMS INERTIAL MEASUREMENT APPARATUS HAVING SLANTED ELECTRODES FOR QUADRATURE TUNING," to Ayazi et al., filed Jun. 13, 2016, the disclosure of which is incorporated by reference herein in its entirety.

FIGS. 5A, 5B, and 5D are plan view scanning electron microscope (SEM) images illustrating a sub-micron capacitive gap comb-drive, a top tuning electrode, and a slanted tuning electrode, respectively, while FIG. 5C is a cross-section illustrating attachment of a sub-micron capacitive gap comb-drive, annulus resonator member, top tuning/sensing electrodes, and a slanted tuning electrode to a substrate in accordance with some embodiments of the present disclosure. As shown in FIGS. 5A and 5C, the comb-drive element **115** includes a top polysilicon layer **115b'** (to which the second comb fingers **115b** are connected), and a single crystal silicon (SCS) anchor structure **510** connects the top polysilicon layer **115b'** to a portion of a buried oxide layer **102** on the substrate **101**. A SCS anchor **110** suspends the annulus resonator member **105** over the substrate **101**. The SCS anchor **110** is connected to a portion of the buried oxide layer **102** on the substrate **101**. Polysilicon layer portions **430'** defining the top tuning electrode **430**, as shown in FIGS. 5B and 5C, may also be connected to the SCS anchor **110**. As shown in FIGS. 5C and 5D, the slanted electrode **420** is defined by a top polysilicon layer **420'**, and a SCS anchor **511** connects the top polysilicon layer **420'** to a portion of the buried oxide layer **102** on the substrate **101**.

FIG. 6A is a perspective view illustrating locally-engineered tether structures **125**, **130** that couple an annulus

12

resonator member **105** to a central anchor structure **110** in an annulus pitch/roll BAW gyroscope in accordance with some embodiments of the present disclosure. In contrast with the lower vibration resistance and reliability of some conventional low frequency MEMS gyroscopes, embodiments of the present disclosure may take advantage of BAW resonance modes by using locally engineered anchoring/tethering structures **125**, **130**, which may provide higher reliability. As shown in FIG. 6A, the annulus resonator member **105** is suspended to the anchor structure **110** by tether structures **125**, **130**. In the embodiment of FIG. 6A, the tether structures **125**, **130** are located at nodal points of the out-of-plane sense mode. As shown in the enlarged portions of FIG. 6A, tether structures **125** and **130** at different locations of the interior of the annulus resonator member **105** have different shapes, and are locally engineered or configured to allow only in-plane movement that coincides with the local deformation of the in-plane drive mode. In particular embodiments, the tether structures **125** adjacent the comb-drive elements **115** have a same or symmetrical shape, which is different from the shape of the tether structures **130**. Consequently, the annulus resonator member **105** can be substrate-decoupled for both the drive and sense mode, but rigid for translational motions, and can reject undesired deformations. FIGS. 6B and 6C are enlarged views illustrating compliant and rigid directions of the different locally-engineered tether structures of FIG. 6A. The structures of the tether elements **125**, **130** can thus be configured to achieve low support loss, while keeping the frequencies of undesired translational modes high.

Embodiments of the present disclosure are directed to the design, fabrication and characterization of self-aligned nano-gap comb-drive actuators for high frequency bulk acoustic wave (BAW) resonators. The comb-drive is implemented to actuate a high-Q 1 MHz annulus BAW resonator with gyroscopic modes. Some embodiments can achieve a linear force density of about $261.5 \text{ pN/V}^2 \mu\text{m}$. As a result, vibration amplitudes as large as 350 nm can be measured using relatively small voltages. An equivalent model estimation of the mechanical nonlinearity of the resonator indicates a spring hardening effect at large displacements. Features of such embodiments are further described in the publication "HARPSS-Fabricated Nano-Gap Comb-Drive for Efficient Linear Actuation of High Frequency BAW Resonators" to Wen, et al., IEEE International Micro Electro Mechanical Systems Conference (MEMS 2016), Shanghai, China, January 2016, pp. 1014-1017, the disclosure of which is incorporated by reference herein in its entirety.

High frequency BAW resonators and BAW inertial sensors are increasingly used for high performance sensor applications, due for example to their small size, robustness, and high quality factor (Q). Due to their high stiffness, efficient actuation of these devices presents a challenge. Capacitive transduction is typically used in MEMS as it provides high Q and clean spectrum. BAW devices typically rely on parallel-plate actuation, as comb-gaps of conventional comb-drives are in the range of a few microns, and thus may yield insufficient force to actuate BAW resonators. A High Aspect-Ratio Polysilicon and Single-crystal Silicon (HARPSS™) process can provide parallel-plate transducers with nano-gaps, which can be used to achieve relatively low motional resistance (R_m) in capacitive BAW resonators.

Although a HARPSS™-fabricated parallel-plate capacitor can offer efficient actuation for BAW resonators, it has a disadvantage of a small linear actuation range, typically limited to about 10% of the gap. For a typical HARPSS™ gap of 200 nm, the linear drive amplitude is less than 20 nm.

On the other hand, larger resonance amplitude is favorable for many MEMS applications. For example, in MEMS oscillators, larger resonance amplitude can offer lower phase noise, and in MEMS gyroscopes, sensitivity and noise performance can improve linearly with increased drive amplitude.

BAW resonators may have improved power handling as compared to low-frequency flexural resonators. Nevertheless, in many applications, the energy storage of BAW resonators may be limited by electrical nonlinearity, and an advantage of large intrinsic power handling capability is not fully exploited. Therefore, an actuator design with high actuation force and large linear actuation range may be desirable.

Some embodiments of the present disclosure provide a sub-micron gap comb-drive actuator that provides actuation forces similar to a HARPSS™ parallel-plate actuator, but with a much larger linear drive amplitude. In particular, embodiments of the present disclosure provide a self-aligned HARPSS™-fabricated nano-gap comb-drive actuators, which offers a high actuation force density for high frequency (e.g., greater than 300 kHz) BAW resonators, while increasing the linear drive range by about 10 times or more compared to nano-gap parallel-plate actuators. With reduced electrical nonlinearity, the mechanical nonlinearity of BAW resonators (specifically, the m=2 wineglass mode of an annulus BAW resonator) is estimated with an equivalent length-extension (LE) model, and can be confirmed by experimental measurements.

In HARPSS™ processes, thermal oxidation of silicon is used to define nano-gaps between single crystal silicon (SCS) comb finger electrodes and polysilicon comb finger electrodes. The SCS comb fingers and polysilicon comb fingers are interdigitated and may include tapered SCS fingers and self-aligned polysilicon fingers formed by trench refilling, separated with nano-scale capacitive gaps. In particular, implementation of comb-drives using a HARPSS™ process in accordance with some embodiments of the present disclosure involves: (i) SCS deep reactive ion etching (DRIB) to form one set of comb-fingers; (ii) thermal oxidation to define gap size; and (iii) polysilicon trench refilling and selective etching to form the other set of comb-fingers. The comb-drive operates in a gap-closing mode, and the tapering angle is selected or otherwise configured based on actuation force and linear actuation range requirements.

Conventionally, some comb-drives may rely on the change of overlapping area between comb-fingers, which requires surface continuity at the overlapping/non-overlapping boundary. FIGS. 7A and 7B are schematic plan views of comb-fingers fabricated with HARPSS™ processes. In particular, FIG. 7A illustrates an ideal area-changing comb-drive, while FIG. 7B illustrates a non-ideal area-change comb-drive. In HARPSS™, polysilicon fingers **715b** are formed by selective DRIE of polysilicon from refilled trenches between sidewalls of SCS fingers **715a**. Their sidewall profile depends on lithography and etching accuracy. The sidewall is only continuous in an ideal case with perfect alignment and etching, as shown in FIG. 7A. In reality, misalignment and etching imperfections exist. When the gaps between the fingers are in nano-scale, small misalignment can cause significant surface discontinuity and steps that disable the comb-drive, as shown in FIG. 7B. That is, HARPSS™-fabrication processes may not be successfully used to implement area-changing comb-drives.

FIG. 8 is a schematic plan views of comb-fingers fabricated with HARPSS™ processes in accordance with embodiments of the present disclosure. In particular, FIG. 8

illustrates a self-aligned gap-closing comb-drive **815**, where the comb-fingers **815a**, **815b** are tapered and the gap size varies when the two sets of fingers **815a**, **815b** move relatively. For gap-closing operation, surface continuity is not required. Therefore, a gap-closing operation may be used to eliminate lithography dependency and achieve self-aligned comb-fingers. As shown in FIG. 8, polysilicon is etched off completely on both ends of the polysilicon fingers **815b**. The poly etching mask openings indicate the locations where polysilicon inside the trenches (defined between sidewalls of the SCS comb fingers **815a**) is removed during poly patterning step. This forms tapered polysilicon fingers **815b** with a self-aligned nature, such that shape and functionality of the fingers **815b** are not affected by lithography accuracy. As discussed above with reference to FIGS. 3A and 3B, the gap-closing operation has a finite linear range; however, with tapering angles in accordance with embodiments described herein, this range can be pushed beyond a mechanical nonlinearity limit. The electrostatic force $F_{electrostatic}$ and the linear drive range q_{linear} of the comb-drive are given by:

$$F_{electrostatic} = \frac{1}{2} \frac{2N\epsilon t L_{comb} \sin\theta}{g_0^2} V^2, \quad (1)$$

$$q_{linear} = \frac{0.1g_0}{\sin\theta},$$

where n, t, L_{comb} , θ , and g_0 are the number of fingers, device thickness, length of the tapered region, tapering angle, and gap size. It can be seen from equation (1) that reducing θ increases linear range with the cost of reduced force. This trade-off can be compensated by increasing L_{comb} or N. In some embodiments, θ may generally have a range between about 1 and 10 degrees. Also, since the electrostatic force is inversely proportional to g_0^2 , HARPSS™ enabled nano-gap improves the transduction efficiency significantly.

In some embodiments described herein, a nano-gap comb-drive actuator is implemented to actuate an annulus resonator member **905** in its m=2 wineglass mode at a resonance frequency of about 1 MHz. As shown in FIGS. 9A and 9B, an annulus BAW resonator **900** can be used as a Coriolis pitch/roll gyroscope with m=2 in-plane wineglass mode as drive mode (FIG. 9A) and m=3 out-of-plane mode as sense mode (FIG. 9B). Implementation of comb-drive can thus improve BAW gyroscope performance with increased drive amplitudes.

A maximum resonance amplitude (q) subject to the device nonlinearity can be evaluated by the amplitude-frequency (A-f) effect (shift in resonance frequency at large q):

$$f_0' = (1 + \kappa q^2) f_0, \quad (2)$$

where κ is the A-f coefficient. Nonlinearity in a capacitive resonator includes electrical and mechanical nonlinearity. Electrical nonlinearity causes spring softening effect, and mechanical nonlinearity can cause either spring softening or hardening effect. Electrical nonlinearity is expected to be minimal or negligible in comb-drive, and mechanical nonlinearity may thus be more dominant. Mechanical nonlinearity of a SCS resonator may vary with mode shape, doping level, and crystal orientation. As the m=2 wineglass mode of an SCS annulus resonator may have complex strain distribution, in order to estimate mechanical nonlinearity of the wineglass mode, an equivalent lumped-element (LE) model with scaled nonlinear Young's modulus (which can be characterized with LE simulations) may be used.

FIG. 10 illustrates an equivalent LE model of an annulus resonator member **1005** in accordance with some embodiments of the present disclosure. In particular, as shown in FIG. 10, the annulus **105** may be mapped into small non-linear spring-mass elements, and i-distribution is transferred from q to k, resulting in a LE mode shape with the same nonlinearity. In the annulus wineglass mode, radial and shear stress are relatively small and their contribution to nonlinearity can be negligible. The Lagrangian function of the resonator system is given by:

$$\begin{aligned} L &= \sum_{ij} (T_{ij} - U_{ij}) \\ &= \sum_{ij} \left[\frac{1}{2} L_i A \rho \dot{q}_{ij}^2 - \sum_n \frac{k_n}{n+2} (q_{ij} - q_{i,j-1})^{n+2} \right] \\ &= \sum_{ij} L_i A \left[\frac{1}{2} \rho \dot{q}_{ij}^2 - \sum_n \frac{E_n}{n+2} \left(\frac{\Delta L_{ij}}{L_i} \right)^{n+2} \right] \\ &= \sum_{ij} L_i A \left(\frac{1}{2} \rho \dot{q}_{ij}^2 - \sum_n \frac{E_n}{n+2} S_{ij}^{n+2} \right), \end{aligned} \quad (3)$$

where q_{ij} , L_i , A , and E_n are the displacement vector, strain, length, cross-section area, and nth order Young's modulus of element ij. Based on Lagrangian mechanics:

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{q}} \right) - \frac{\partial L}{\partial q} = \sum_{ij} \left[\frac{d}{dt} \left(\rho \dot{q}_{ij} \frac{\partial \dot{q}_{ij}}{\partial \dot{q}} \right) + \sum_n E_n S_{ij}^{n+1} \frac{\partial S_{ij}}{\partial q} \right] = 0 \quad (4)$$

As shown in FIG. 10, the resonator is divided into (100) and (110) sections to partially preserve the anisotropy, and E_n is constant in each section. Defining f_i as the normalized i-distribution (width-distribution) of strain results in:

$$\begin{aligned} \sum_{ij} \left[\frac{d}{dt} \left(c_{1-ij} \rho \dot{q}_{ij} \frac{\partial \dot{q}}{\partial \dot{q}} \right) + \sum_n E_n (f_i S_j)^{n+1} f_i \frac{\partial S_j}{\partial q} \right] &= \\ c_1 \rho \ddot{q} + \sum_{ij} \left[\sum_n (E_n f_i^{n+2}) S_j^{n+1} \frac{\partial S_j}{\partial q} \right] &= \\ c_1 \rho \ddot{q} + \sum_j \left[\sum_n (a_n E_n) S_j^{n+1} \frac{\partial S_j}{\partial q} \right] &= c_1 \rho \ddot{q} + \sum_j E' S_j \frac{\partial S_j}{\partial q} \end{aligned} \quad (5)$$

S_j is i-index averaged strain with only j-distribution (arc-distribution), and c_j , a_n are integration constants. For infinitesimal elements, a_n is given by:

$$a_n = \int_0^{W_{annulus}} \frac{(f(w))^{n+2}}{W_{annulus}} dw \quad (6)$$

with the distribution function $f(w)$ evaluated numerically in FEM simulation. The Lagrangian equation (4) becomes:

$$c_1 \rho \ddot{q} + \sum_j E' S_j \frac{\partial S_j}{\partial q} = c_1 \rho \ddot{q} + c_2 \sum_j \frac{1}{2} k_j' \frac{\partial (q_j - q_{j-1})^2}{\partial q} = 0 \quad (7)$$

The arc-distribution of strain in the wineglass mode resembles the length-distribution in LE mode. Therefore, equation (7) represents a LE resonator with a scaled non-linear Young's modulus E' , which leads to the same $\Delta f/f S^2$ value as the annulus resonator, where S is the maximum strain. The length (c_2) and density (c_1) of the LE resonator may then be adjusted (for example, in FEM simulation) to achieve the same S/q and f as the annulus resonator, thus the same $\kappa = \Delta f/q^2$.

FIGS. 11A-11G are perspective views illustrating a process flow for fabricating self-aligned interdigitated comb fingers of a comb-drive element using a HARPSS™ fabrication process in accordance with some embodiments of the present disclosure. A comb-drive annulus BAW resonator may be designed with the $m=2$ mode aligned to (100) direction. For example, the resonator member **105** may be fabricated through a HARPSS™ process on a silicon-on-insulator (SOI) wafer with 40 μm thick, 15 $\text{m}\Omega\text{ cm}$ phosphorus-doped device layer. In particular, as shown in FIG. 11A, a single-crystal silicon (SCS) device layer, which may be part of or integral to the resonator member **105**, is etched by DRIE to define SCS comb fingers **115a** and oxidized to form an oxide layer **1101** (for example, a 190 nm-thick oxide layer) on the sidewalls of the comb fingers **115a**. In FIG. 11B, trenches defined by the sidewalls of comb fingers **115a** are filled by LPCVD polysilicon **1015**. Portions of the polysilicon **1015** on top is etched back, and portions of the polysilicon **1015** in the trench are patterned to define polysilicon comb fingers **115b**, as shown in FIG. 11C. The respective lengths of the SCS comb fingers **115a** are longer than the respective lengths of the polysilicon comb fingers **115b** in a direction along the respective sidewalls thereof.

In FIG. 11D, tetraethyl orthosilicate (TEOS) silicon oxide **1020** is used to refill the trench, and is etched back from the top. A top TEOS layer **1025** is deposited and patterned, as shown in FIG. 11E, to define openings therein for connections to the polysilicon comb fingers **115b**. In FIG. 11F, a top polysilicon layer **115b'** is deposited and patterned to form connections to the polysilicon comb fingers **115** through the openings in the top TEOS layer **1025**. HF is then used to remove the TEOS **1020**, **1025** and sacrificial oxide **1101** and release the device, as shown in FIG. 11G, forming the completed comb-drive, where the polysilicon comb fingers **115b** are self-aligned within trenches defined by the respective sidewalls of the SCS comb fingers **115a**.

FIGS. 12A, 12B, and 12C are scanning electron microscope (SEM) images illustrating a plan view of a comb-drive annulus BAW resonator **1200** in accordance with some embodiments of the present disclosure. In particular, FIG. 12A illustrates the elements of the BAW resonator, including annulus resonator member **1205**, top tuning electrodes **1220**, and comb-drive element **1215**. FIG. 12B is an enlarged view of the comb-drive structure **1215** including the top polysilicon layer **1215'**, and FIG. 12C is an enlarged view of the interdigitated comb fingers **1215a**, **1215b** and nano-gaps of the comb-drive structure **1215**. In FIG. 12C, the comb-fingers **1215a**, **1215b** are separated by 190 nm gaps. In particular, some parameters used in the comb-drive shown in FIGS. 12A-12C are $N=31$, $L_{comb}=5\text{ }\mu\text{m}$, $\theta=2.4^\circ$, and $g_0=190\text{ nm}$. Based on equation (1) and simulated effective mass $M_{eff}=16.7\text{ }\mu\text{g}$, resonance frequency $f=1\text{ MHz}$, and $Q=180\text{ k}$

17

of the resonator, the linear drive range, electrostatic force density, and R_m may be calculated to be 453.7 nm, 251.3 pN/V² μ m and 77.6 k Ω .

The frequency response of the m=2 wineglass mode may be measured to verify agreement with simulation data. In some embodiments, a high-Q of ~178,000 may be measured at 0.983 MHz with $V_p=22$ V, matching the value of Q given by FEM thermoelastic damping (TED) simulations. The resonance response R_m of the resonator may also be evaluated to verify agreement with the theoretical value. In some embodiments, R_m may be 71.2 k Ω . From the definition of R_m we have:

$$R_m = \frac{i_d}{v_d} = V_p \frac{dC}{dx} \frac{1}{\omega} = \frac{V_p^2 Q}{\omega M_{eff}} \left(\frac{dC}{dx} \right)^2 \Rightarrow \quad (8)$$

$$\frac{dC}{dx} = \frac{1}{V_p} \sqrt{\frac{\omega M_{eff}}{R_m Q}}.$$

The force density may be evaluated using R_m , Q, and ω as:

$$f_{comb} = \frac{F_{comb}}{2NW_{comb}V_{applied}^2} \quad (9)$$

$$= \frac{V_{applied}^2}{4NW_{comb}V_{applied}^2} \frac{dC}{dx}$$

$$= \frac{1}{4NV_pW_{comb}} \sqrt{\frac{\omega M_{eff}}{R_m Q}}$$

$$= 261.5 \frac{pN}{V^2 \mu m}.$$

BAW resonator apparatus including nano-gap comb-drives in accordance with some embodiments of the present disclosure may achieve a force density of 261.5 pN/V² μ m or more, which may be significantly improved compared to other comb-drive designs. A significant improvement may be attributable to implementing nano-gaps in accordance with processes described herein.

Nonlinearity of the resonator may be characterized by increasing v_d with constant V_p . At each v_d , the drive amplitude may be calculated using measured R_m and Q:

$$q_{drive} = \frac{QV_p v_d}{\omega^2 M_{eff}} \frac{dC}{dx} = v_d \sqrt{\frac{Q}{\omega^3 M_{eff} R_m}} \quad (10)$$

During the v_d sweeping, no spring softening effect may be observed, which may verify the reduced electrical nonlinearity of the comb-drive transducer. With a drive exceeding 200 nm (10 \times larger than the linear range of some parallel-plate designs), the resonance peak bends to higher frequency for larger AC voltage, showing that a spring hardening effect, starts to emerge. Spring hardening effect in BAW gyroscopes can be further exploited for nonlinearity cancellation in large drive amplitude gyroscope designs according to some embodiments described herein.

According to some embodiments of the present disclosure, a nano-gap (190 nm) comb-drive actuator may be implemented on a 40 μ m thick device layer substrate using a HARPSSTTM fabrication process. A high linear force density (e.g., up to 261.5 pN/V² μ m), as well as efficient linear

18

actuation over a 200 nm range can be achieved in some embodiments of a 1 MHz annulus BAW resonator, indicating some benefits of using a comb-drive actuator for high frequency BAW resonators. Mechanical nonlinearity measurements on the annulus BAW resonators may be made possible by the larger linear actuation range, and spring hardening effects may be observed.

The present inventive concepts have been described with reference to the accompanying drawings, in which embodiments of the inventive concepts are shown. However, the present disclosure should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and to fully convey the scope of the embodiments to those skilled in the art. Like reference numbers refer to like elements throughout.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the embodiments. As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises,” “comprising,” “includes,” and/or “including,” when used herein, specify the presence of stated features, steps, elements, and/or components, but do not preclude the presence or addition of one or more other features, steps, elements, components, and/or groups thereof. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

It will also be understood that when an element is referred to as being “on,” “coupled to,” “connected to,” or “responsive to” another element, it can be directly “on,” “coupled to,” “connected to,” or “responsive to” the other element, or intervening elements may be present. In contrast, when an element is referred to as being “directly on,” “directly coupled to,” “directly connected to,” or “directly responsive to” another element, there are no intervening elements present. It will also be understood that the sizes and relative orientations of the illustrated elements are not shown to scale, and in some instances they have been exaggerated for purposes of explanation.

Spatially relative terms, such as “above,” “below,” “upper,” “lower,” and the like, may be used herein for ease of description to describe one element or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as “below” other elements or features would then be oriented “above” the other elements or features. Thus, the term “below” can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly. Well-known functions or constructions may not be described in detail for brevity and/or clarity.

It will be understood that, although the terms “first,” “second,” etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another. Thus, a first element could be termed a second element without departing from the teachings of the present embodiments.

Embodiments are described herein with reference to cross-sectional and/or perspective illustrations that are sche-

matic illustrations of idealized embodiments (and intermediate structures). As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the actual shape of a region of a device and are not intended to limit the scope of the present inventive concept.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which these embodiments belong. It will be further understood that terms, such as those defined in commonly-used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly-formal sense unless expressly so defined herein.

The foregoing is illustrative of the present disclosure and is not to be construed as limiting thereof. Although a few exemplary embodiments have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the teachings and advantages of the inventive concepts. Accordingly, all such modifications are intended to be included within the scope of the inventive concepts as defined in the claims.

That which is claimed:

1. A bulk acoustic wave resonator apparatus, comprising: a resonator member;
at least one anchor structure coupling the resonator member to a substrate; and
a comb-drive element connected to the resonator member, the comb-drive element comprising first comb fingers protruding from the resonator member, and second comb fingers interdigitated with the first comb fingers to define sub-micron capacitive gaps therebetween,
wherein one of the first comb fingers and the second comb fingers are longer than the other of the first comb fingers and the second comb fingers along respective lengths between opposing ends thereof,
wherein the first and second comb fingers overlap along the respective lengths between the opposing ends thereof, and wherein operation of the comb-drive element is configured to vary the sub-micron capacitive gaps without altering an amount of the overlap along the respective lengths.
2. The apparatus of claim 1, wherein the first comb fingers comprise a different material than the second comb fingers.
3. The apparatus of claim 2, wherein respective sidewalls of the second comb fingers are oppositely-tapered relative to respective sidewalls of the first comb fingers between the opposing ends thereof such that operation of the comb-drive element varies the sub-micron capacitive gaps at the respective sidewalls of the first and second comb fingers without altering the amount of the overlap between the first and second comb fingers along the respective lengths thereof.
4. The apparatus of claim 3, wherein the respective sidewalls of the first comb and second comb fingers are tapered at an angle relative to the respective lengths thereof such that a linear drive range of the comb-drive element exceeds a mechanical non-linearity limit of the resonator member.

5. The apparatus of claim 4, wherein the resonator member comprises an annulus, and wherein the angle is in a range of about 1 degree to about 5 degrees.

6. The apparatus of claim 3, wherein the second comb fingers are free of connection to one another at both of the opposing ends thereof.

7. The apparatus of claim 6, wherein the first comb fingers are longer than the second comb fingers along the respective lengths between the opposing ends thereof, and wherein the second comb fingers are confined within trenches defined by the respective sidewalls of the first comb fingers.

8. The apparatus of claim 7, wherein the second comb fingers are self-aligned within the trenches defined by the respective sidewalls of the first comb fingers, wherein the first comb fingers comprise single-crystal silicon.

9. The apparatus of claim 8, wherein the second comb fingers comprise polysilicon, and further comprising a polysilicon layer connecting the second comb fingers at respective surfaces thereof opposite the substrate such that the polysilicon layer and the second comb fingers define a unitary member.

10. The apparatus of claim 9, wherein the polysilicon layer is coupled to the substrate by a single crystal silicon anchor.

11. The apparatus of claim 8, wherein the resonator member comprises single-crystal silicon, and wherein the first comb fingers are connected at one of the opposing ends thereof adjacent a perimeter of the resonator member such that the resonator member and the first comb fingers define a unitary member.

12. The apparatus of claim 2, wherein the sub-micron capacitive gaps are between about 100 nanometers (nm) and 500 nm, and wherein a resonance frequency of the apparatus is greater than about 300 kilohertz (kHz).

13. The apparatus of claim 2, wherein the apparatus is a gyroscope.

14. The apparatus of claim 13, wherein the gyroscope is a pitch/roll gyroscope, and wherein the resonator member is an annulus.

15. The apparatus of claim 14, wherein the comb-drive element is connected to a perimeter of the annulus at an anti-nodal point for an in-plane drive mode thereof, wherein movement of the resonator member in the in-plane drive mode is parallel to a plane defined by a surface of the substrate.

16. The apparatus of claim 15, wherein the comb-drive element is a first comb-drive element, and further comprising:

a second comb-drive element connected to the perimeter of the annulus at a location opposite to the first comb-drive element,

wherein the first comb-drive element is a drive electrode configured to actuate the resonator member and the second comb-drive element is a sense electrode configured to detect movement of the resonator member.

17. The apparatus of claim 2, wherein a perimeter of the resonator member is at least partially defined by respective sidewalls that are slanted at an angle relative to a plane defined by a surface of the resonator member along a cross-section perpendicular to the surface of the resonator member.

18. The apparatus of claim 17, wherein the resonator member comprises single crystal silicon, and wherein the angle is defined by a (111) crystal plane to be about 54.7 degrees.

21

19. The apparatus of claim 17, further comprising:
 respective tuning electrodes disposed adjacent the respective sidewalls of the resonator member and separated therefrom by respective capacitive gaps, wherein portions of the respective tuning electrodes are slanted at respective angles parallel to the angle of the respective sidewalls of the resonator member to define the respective capacitive gaps.
20. The apparatus of claim 19, wherein, responsive to application of a quadrature tuning voltage to the respective tuning electrodes, a frequency of an in-plane drive mode of the resonator member and a frequency of an out-of-plane sense mode of the resonator member that is orthogonal to the in-plane drive mode are mode-matched.
21. The apparatus of claim 2, wherein the at least one anchor structure comprises respective anchor structures coupling the resonator member to the substrate at different locations of the resonator member, and further comprising:
 respective tether structures coupling the respective anchor structures to the resonator member at the different locations thereof, wherein ones of the respective tether structures at the different locations of the resonator member comprise different shapes, and wherein the different shapes comprise asymmetric shapes.
22. The apparatus of claim 21, wherein the respective tether structures are coupled to the resonator member at respective nodal points for an out-of-plane sense mode thereof, wherein movement of the resonator member in the out-of-plane sense mode is non-parallel to a plane defined by a surface of the substrate.
23. The apparatus of claim 21, wherein the different shapes are configured to confine movement of portions of the resonator member to coincide with local deformations corresponding to an in-plane drive mode, wherein movement of the resonator member in the in-plane drive mode is parallel to a plane defined by a surface of the substrate, and to provide rigidity for movement non-parallel to the plane defined by the surface of the substrate.

22

24. The apparatus of claim 21, wherein the resonator member comprises an annulus, wherein the respective anchor structures and tether structures are positioned within an interior of the annulus at the different locations relative to the comb-drive element, and wherein the respective anchor structures are coupled to one another by a disk-shaped member.
25. A bulk acoustic wave resonator apparatus, comprising:
 a resonator member, wherein a perimeter of the resonator member is at least partially defined by respective sidewalls that are slanted at an angle relative to a plane defined by a surface of the resonator member;
 at least one anchor structure coupling the resonator member to a substrate;
 a comb-drive element connected to the resonator member, the comb-drive element comprising first comb fingers protruding from the resonator member, and second comb fingers interdigitated with the first comb fingers to define sub-micron capacitive gaps therebetween, wherein the first comb fingers comprise a different material than the second comb fingers; and
 respective tuning electrodes disposed adjacent the respective sidewalls of the resonator member and separated therefrom by respective capacitive gaps, wherein portions of the respective tuning electrodes are slanted at respective angles parallel to the angle of the respective sidewalls of the resonator member to define the respective capacitive gaps,
 wherein the respective tuning electrodes comprise quadrature cancellation electrodes, and wherein, responsive to application of a quadrature tuning voltage thereto, the respective tuning electrodes are configured to produce a corresponding electrostatic force that provides a torque in a direction between an in-plane direction that is parallel to a surface of the substrate and an out-of-plane direction that is orthogonal to the in-plane direction.

* * * * *