



US006254130B1

(12) **United States Patent**
Jayaraman et al.

(10) **Patent No.: US 6,254,130 B1**
(45) **Date of Patent: Jul. 3, 2001**

(54) **METHOD AND APPARATUS FOR
CONTROLLING AIR BAG DEPLOYMENT**

(75) Inventors: **Sundaresan Jayaraman; Rangaswamy
Rajamanickam; Chandramohan
Gopalsamy**, all of Atlanta; **Sungmee
Park**, Tucker, all of GA (US)

(73) Assignee: **Georgia Tech Research Corporation**,
Atlanta, GA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/295,982**

(22) Filed: **Apr. 21, 1999**

Related U.S. Application Data

(60) Provisional application No. 60/081,640, filed on Apr. 13,
1998.

(51) **Int. Cl.**⁷ **B60R 21/16**

(52) **U.S. Cl.** **280/743.2; 280/743.1;**
280/735; 280/731

(58) **Field of Search** 280/743.2, 743.1,
280/735, 731

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,073,418	12/1991	Thornton et al.	428/34.9
5,165,716	11/1992	Imai et al.	280/730
5,236,775	8/1993	Swoboda et al.	428/225
5,358,273	10/1994	Onishi et al.	280/743 R
5,362,101 *	11/1994	Sugiura et al.	280/743
5,547,215	8/1996	Taguchi et al.	280/732
5,554,424	9/1996	Krummheuer et al.	428/35.2
5,573,270	11/1996	Sogi et al.	280/740
5,637,114	6/1997	Hohnke	8/137
5,722,686 *	3/1998	Blackburn et al.	280/735
5,732,375 *	3/1998	Cashler	701/45
5,887,894 *	3/1999	Castagner et al.	280/743.2
5,957,490 *	9/1999	Sinnhuber	280/735

6,018,693 *	1/2000	Blackburn et al.	701/45
6,056,079 *	5/2000	Cech et al.	180/273
6,076,854 *	6/2000	Schenck et al.	280/743.2
6,092,838 *	7/2000	Walker	280/735

OTHER PUBLICATIONS

Keshavaraj, et al., "Analysis of Fabrics Used in Passive
Restraint Systems—Airbags," J. Text. Inst., 1996, 87, Part 1,
No. 3, Textile Institute, pp. 554–571.

Weiss, "Curbing Air Bags' Dangerous Excesses New
Smarts, New Sensors, and Variable Inflation Could Reduce
Injury and Death," Science News, vol. 154, Sep. 26, 1998,
pp. 206–207.

"Passive Safety," Focus, Automotive Engineering, Nov.
1997, pp. 43–54.

"Smashing Performer," Automotive Engineering Safety,
Mar. 1998, pp. 29–30.

"Protect and Survive," Automotive Engineering: Safety, Jul.
1996, pp. 46–47.

Conlee, "Passenger Side Air Bag System for Open Interior
Architecture," pp. 19–22.

(List continued on next page.)

Primary Examiner—J. J. Swann


Assistant Examiner—J. Allen Shriver

(74) *Attorney, Agent, or Firm*—Thomas, Kayden,
Horstemeyer & Risley, L.L.P.

(57) **ABSTRACT**

The present invention relates to an air bag control system
comprising a restraining apparatus adapted to be connected
to an occupant side of an air bag, an extension/retraction
device used to adjust the degree to which the restraining
apparatus can be extended, and a control device for control-
ling extension and retraction of the extension/retraction
device. In operation, the restraining apparatus can be
retracted by the extension/retraction device in response to a
signal sent by the control device to limit the physical extent
to which the air bag can deploy to prevent injury of a vehicle
occupant adjacent the air bag.

30 Claims, 4 Drawing Sheets

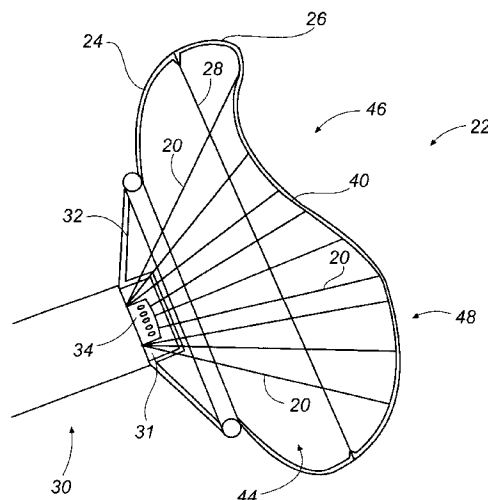

OTHER PUBLICATIONS

"Focus On . . . Passive Safety," Automotive Engineering: Focus, Oct./Nov. 1996, pp. 42-54.

Morton, "In the Bag," Automotive Engineering: Passive Safety, Jul./Aug. 1998, pp. 45-47.

Martin, "Adaptive Airbags Coming: Takata's Smart Strategy Tailors Airbag Performance to Occupant Size, Seating Position, and Crash Situation," AI, Mar. 1997, p. 87.

Kobe, "Smart Airbags: Automakers and Safety Groups Agree that 'Smart' Airbag Technology Will Save Lives—The Key Question is When," AI, Jan. 1997, pp. 62-63.

Visnic, "Smart Bags for Dumb Drivers: Safety System Suppliers Race to Improve Sagging Image," WARD's Auto World, Feature/Safety Engineering, Apr. 1997, pp. 33-36.

Keenan, "Industry to NHTSA: Power Down on Airbags," WARD's Auto World, Feature/Safety Testing, Nov. 1996, pp. 47-48.

"New—Car Dealers Join National Effort to Improve Vehicle Air Bag Safety," <http://www.nadanet.com/news/112296.htm>, Press Release, Nov. 22, 1996, p. 1.

Keshavaraj, et al., "Airbag Fabric Material Modeling of Nylon and Polyester Fabrics Using a Very Simple Neural Network Architecture," Journal of Applied Polymer Science, vol. 60, 1996, pp. 2329-2338.

Keshavaraj, et al., "A Realistic Comparison of Biaxial Performance of Nylon 6,6 and Nylon 6 Fabrics Used in Passive Restraints—Airbags," Journal of Applied Polymer Science, vol. 61, 1996, pp. 1541-1552.

* cited by examiner

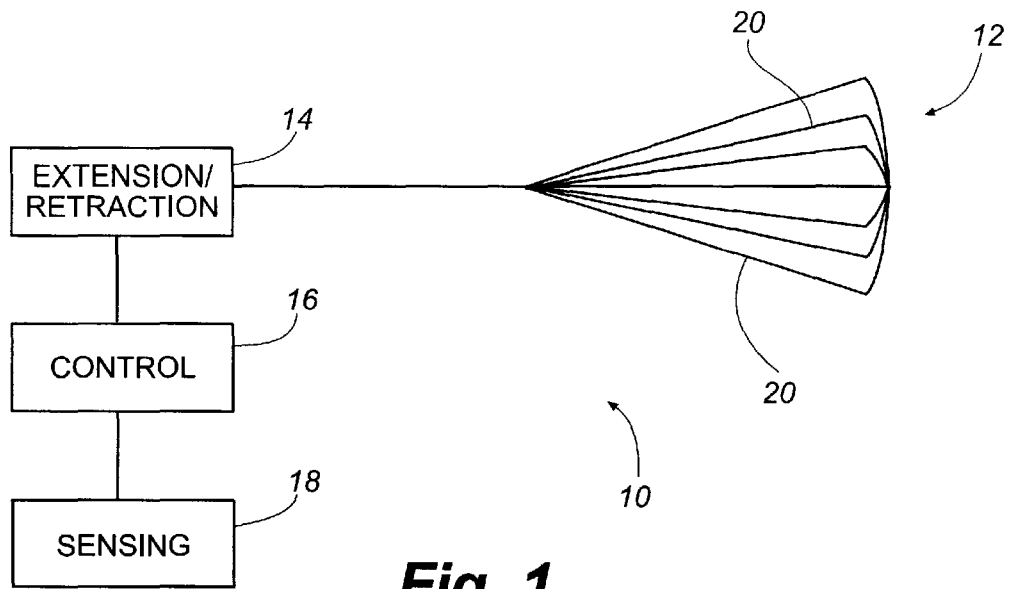


Fig. 1

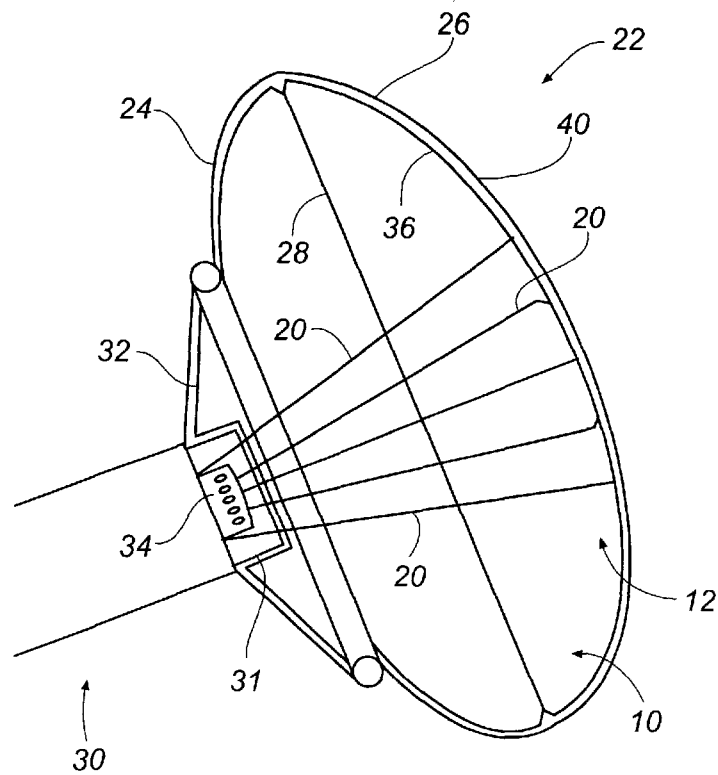
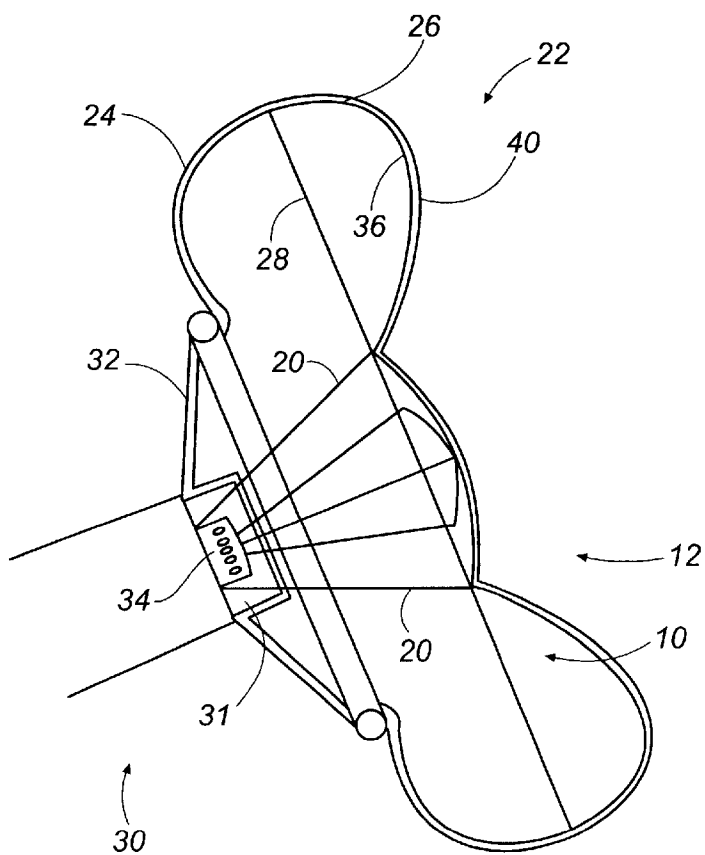
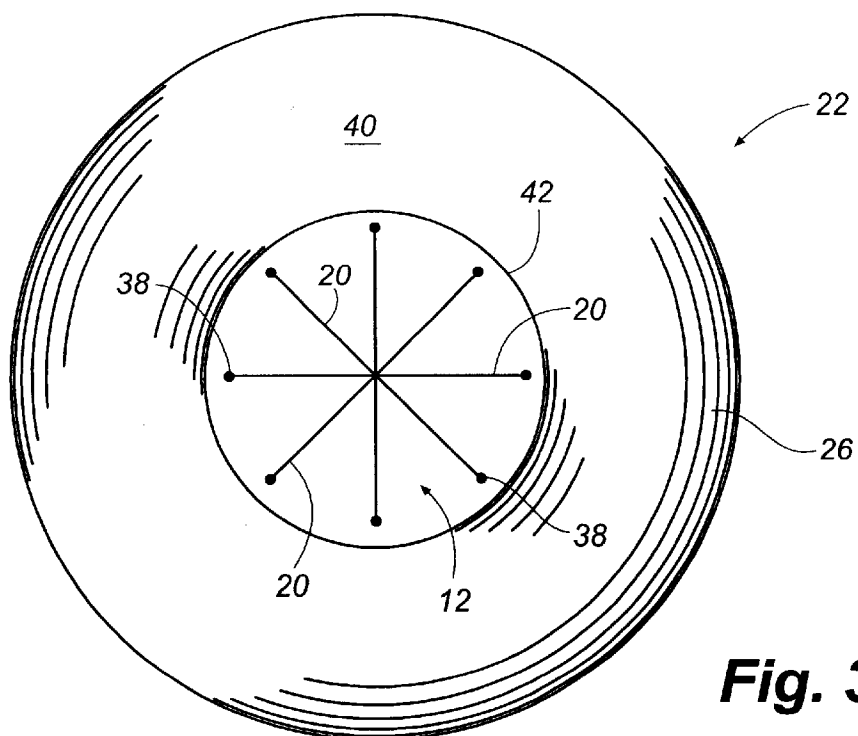


Fig. 2



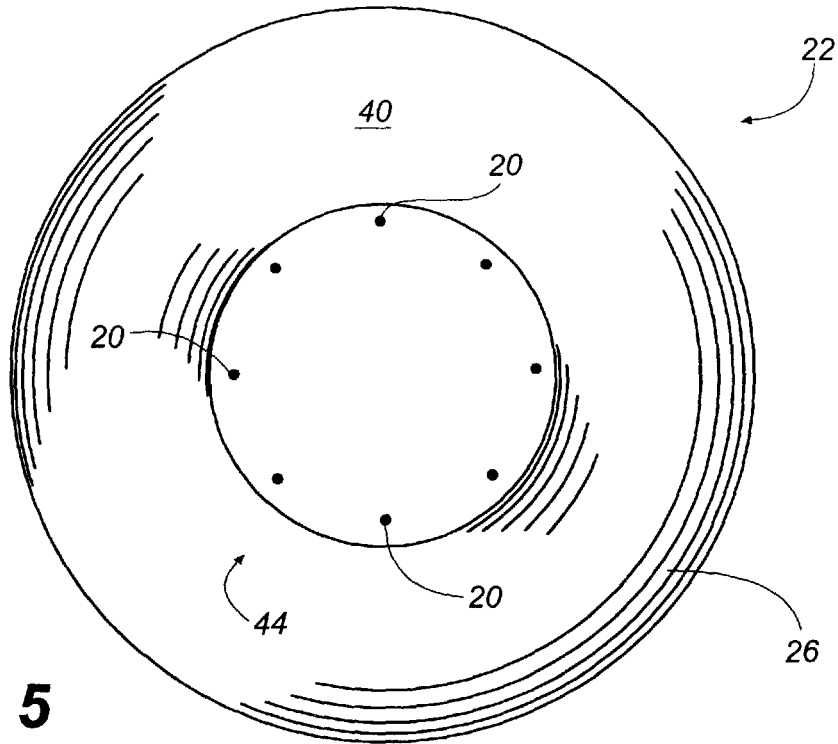


Fig. 5




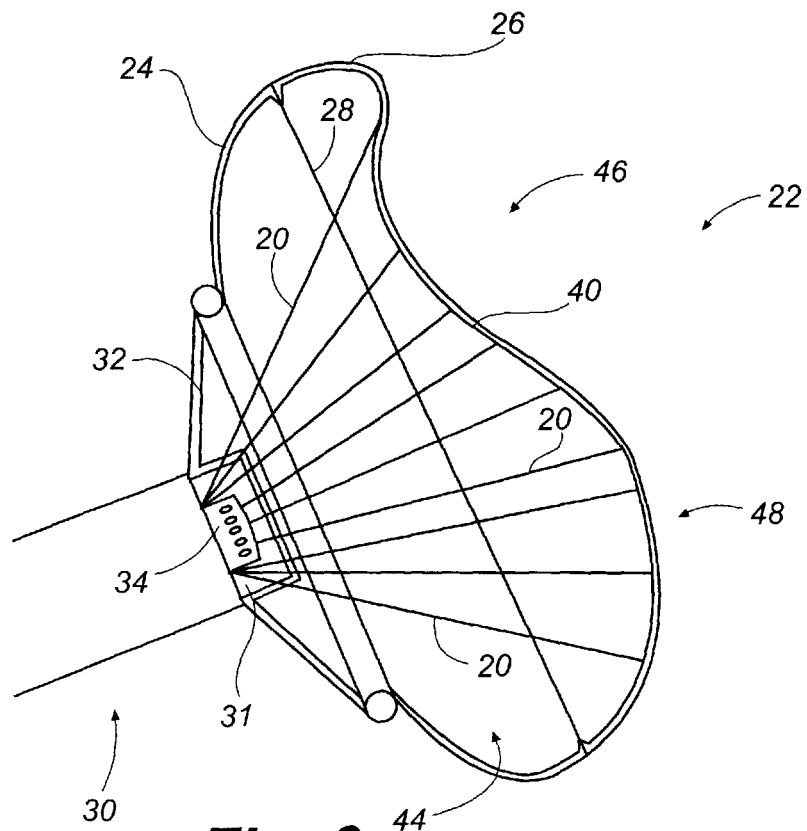


Fig. 6

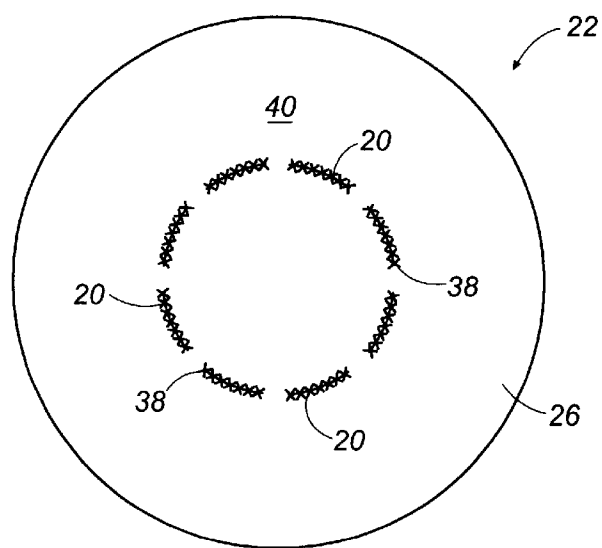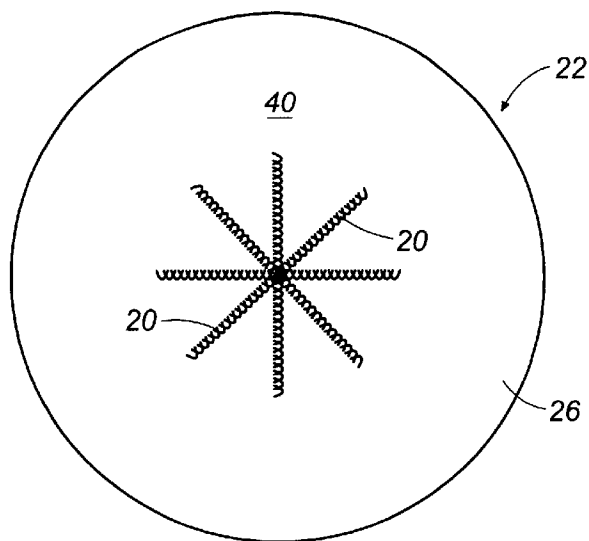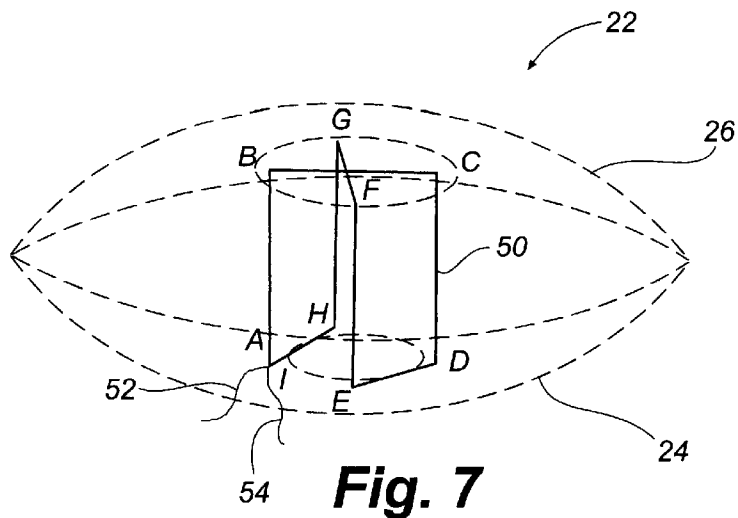

METHOD AND APPARATUS FOR CONTROLLING AIR BAG DEPLOYMENT

CROSS REFERENCE TO RELATED APPLICATION

This application claims the benefit of the filing date of U.S. Provisional Patent Application Ser. No. 60/081,640, filed Apr. 13, 1998. The foregoing disclosure is incorporated herein by reference.

FIELD OF THE INVENTION

The invention generally relates to a method and apparatus for controlling air bag deployment. More particularly, the invention relates to a method and apparatus that can be used to limit the physical extent of air bag deployment.

BACKGROUND OF THE INVENTION

Passive restraint devices known as air bags frequently are used in automobiles to reduce occupant (driver or passenger) injuries and/or fatalities that result from vehicular accidents. As is known in the art, air bag restraint systems restrain forward movement of the occupant to protect him or her from contact with the interior of the vehicle by instantaneously inflating to cushion the occupant. Generally speaking, air bag systems comprise an inflator for releasing a gas (e.g., nitrogen), a bag to be inflated by the released gas, a housing enclosing the inflator and the bag, a sensor detecting a collision of greater than a predetermined magnitude, and a control system that transmits a signal to the inflator to activate inflation of the bag. When the gas is released from the inflator, it fills the bag to exert an inner pressure upon the interior walls of the bag, which urges the bag to inflate.

Ironically, although air bags are intended to prevent injuries, air bags themselves can cause occupant injuries and even fatalities, especially when the occupant is relatively small or frail (e.g., children, the elderly). The primary reason for these injuries, is the high speed and pressure at which such air bags deploy (e.g., 200 mph, 34 psi) as well as the particular part of the person's body that impacts the air bag. Normally, it is the face and neck of such an occupant that bears the brunt of this impact.

In response to the occurrence of such injuries, several manufacturers have begun development of so-called "smart" air bags. Generally speaking, smart air bags use some form of sensing device to determine certain physical characteristics of a vehicle occupant that is to be cushioned by the bag if the vehicle were involved in an accident. For example, if it is determined by the sensing device that the occupant is small in size and/or weight, the air bag is either temporarily disabled or is adjusted to inflate with less force to avoid injuring the occupant. Although such smart air bags may prevent typical air bag injuries, their use could permit more common vehicular injuries to occur. In the case of the temporarily disabled air bag, no buffer whatsoever is provided between the occupant and the vehicle interior to cushion the occupant. As for the less forcefully deploying air bag, it is possible that inflation may not occur quickly enough to fully cushion the occupant, or that the air bag may not inflate to the degree necessary to fully protect the occupant.

From the above, it can be appreciated that it would be desirable to have a method and apparatus for controlling air bag deployment that provides for complete cushioning of the occupant in a vehicular accident with less risk of occupant injury caused by the air bag's deployment.

SUMMARY OF THE INVENTION

The present invention relates to an air bag control system. The system comprises a restraining apparatus adapted to be connected to an occupant side of an air bag, an extension/retraction device used to adjust the degree to which the restraining apparatus can be extended, and a control device for controlling extension and retraction of the extension/retraction device. In operation, the restraining apparatus can be retracted by the extension/retraction device in response to a signal sent by the control device to limit the physical extent to which the air bag can deploy to prevent injury of a vehicle occupant adjacent the air bag.

In a preferred arrangement, the system further comprises a sensing device which senses at least one physical characteristic of the occupant to be cushioned by the air bag. A signal then can be sent from the sensing device to the control device such that the determination can be made as to whether, and to what degree, to restrict deployment of the air bag. By way of example, the sensing device can be adapted to determine the weight, size, and/or position of the occupant.

The objects, features, and advantages of this invention will become apparent upon reading the following specification, when taken in conjunction with the accompanying drawings. It is intended that all such additional features and advantages be included therein with the scope of the present invention, as defined by the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the present invention. In the drawings, like reference numerals designate corresponding parts throughout the several views.

FIG. 1 is a schematic of an air bag control system constructed in accordance with the principles of the present invention.

FIG. 2 is a partial cross-sectional view of a fully deployed air bag including the air bag control system shown in FIG. 1.

FIG. 3 is a front view of an air bag showing a first tether arrangement.

FIG. 4 is a partial cross-sectional view of a partially deployed air bag using the air bag control system shown in FIG. 1.

FIG. 5 is a front view of an air bag showing a second tether arrangement.

FIG. 6 is a partial cross-sectional view of a partially deployed air bag using the tether arrangement shown in FIG. 5.

FIG. 7 is a perspective view of a third tether arrangement.

FIG. 8 is a front view of an air bag showing a fourth tether arrangement.

FIG. 9 is a front view of an air bag showing a fifth tether arrangement.

DETAILED DESCRIPTION

Referring now in more detail to the drawings, in which like numerals indicate corresponding parts throughout the several views, FIG. 1 illustrates an air bag control system 10 constructed in accordance with the principles of the present invention. As indicated in this figure, the control system generally comprises a restraining apparatus 12, an

3

extension/retraction device **14**, a control device **16**, and sensing device **18**. Typically, the restraining apparatus **12** comprises a plurality of tethers **20** that are adapted to connect to the air bag with which the air bag control system **10** is used. By way of example, the tethers **20** can be constructed from high tenacity fiber yarns or straps. Such yams or straps could be constructed from high performance fibers such as polyamides, polyesters, and/or polyethylenes. Although such tethers are deemed preferable, it will be understood from the present disclosure that alternative retaining apparatus could be used, if desired. For example, the retaining apparatus could comprise a telescopic member which is flexible enough so as to be suitable for use within an air bag.

FIG. 2 illustrates a deployed air bag **22** which includes the air bag control system **10** shown in FIG. 1. As indicated in this figure, the air bag **22** typically comprises two separate sections: an inflator side **24** and an occupant side **26**. As is known in the art, both the inflator side **24** and the occupant side **26** are constructed of a high strength woven fabric having specific air permeability properties. By way of example, this fabric can comprise nylon 6,6. The two air bag sides **24**, **26** normally are sewn together along a seam **28**. In the arrangement shown in FIG. 2, the air bag **22** is depicted in a deployed state extending from a steering column **30** of a vehicle (not shown). In particular, the air bag **22** is shown deployed from an air bag housing **31** of the steering wheel **32**. Although the air bag is shown in conjunction with the steering wheel, it is to be appreciated that the principles disclosed herein are equally applicable to passenger air bags, including side impact air bags. Moreover, although a substantially circular air bag is shown in the figures, it is to be understood that these principles are equally applicable to rectangular air bags. Regardless of the location and configuration of the air bag **22**, deployment is effected through use of an inflator head **34** (in the embodiment of FIG. 2, located within the central portion of the steering wheel **32**).

As shown in FIG. 2, the restraining apparatus **12** of the air bag control system **10** extends from the air bag housing **31** to the occupant side **26** of the air bag **22**. In particular, each of the tethers **20** extends from a point adjacent the outer periphery of the inflator head **34** to a specified point along the occupant side **26** of the bag **22**. Although each of the tethers **20** is shown positioned in this location, it will be understood by persons having ordinary skill in the art that the tethers alternatively could extend from a point remote from the inflator head or from a central point within the inflator head, if desired.

As indicated in FIG. 3, each of the tethers **20** of the embodiment extends through an aperture **38** formed in the occupant side **26** of the air bag **22** so that a predetermined length of each tether extends along an outer surface **40** of the air bag occupant side to pass through another aperture **38** formed in occupant side to return to the air bag housing **31**. To prevent shifting of the individual tethers **20** along the outer surface **40** of the air bag **22**, the outer surface can be provided with a coating **42** that covers each tether length. Although this coating **42** could comprise any suitable material, preferably this coating comprises a durable polymeric material. In addition to securing the relative positions of the tethers **20**, this coating **42**, when provided, further strengthens the apertures **38** to prevent tearing of the apertures by the tethers **20** upon bag deployment. Arranged in this manner, the tethers **20** can be used to limit the extent of deployment of the air bag **22**. An example of such limitation is illustrated in FIG. 4. As indicated in this figure, the length of the portion of each tether **20** extending from the air bag

4

housing **31** to the occupant side **26** of the air bag **22** is substantially less than the length of these portions when the air bag is in the fully deployed state illustrated in FIG. 2. The shortening of this distance results in the extent of the air bag's deployment being similarly reduced. With reference back to FIG. 1, this limitation in deployment is effected by the air bag control system **10**. In particular, the extension/retraction device **14** is used to retract the restraining apparatus **12** such that the air bag **22** cannot extend to its fully deployed state. Operating in this manner, the degree of air bag deployment can be restricted by the air bag control system **10**, and in particular by the degree of the retraction of restraining apparatus **12**.

The extension/retraction device **14** can take any one of myriad forms. By way of example, the extension/retraction device **14** can comprise a motorized take-up mechanism which includes a rotatable take-up spool. Irrespective of its particular construction, however, the device **14** preferably includes some form of indexing mechanism, such as a ratchet mechanism, so that the restraining apparatus **12** cannot inadvertently be extended beyond the intended extent. As mentioned above, extension and retraction of the restraining apparatus **12** is controlled by the control device **16**. In a preferred arrangement, the control device **16** comprises a microprocessor. In use, the control device **16** sends a signal to the extension/retraction device **14** to activate the device to either extend or retract the restraining apparatus **12** to modify the degree to which the air bag **22** can deploy. The determination of whether adjustment of the restraining device **12** is needed typically is made by the control device **16** with reference to information sensed by the sensing device **18**. Normally, the sensing device **18** transmits certain information to the control device **16** regarding the physical characteristics of the occupant that is to be cushioned by the air bag **22**. Such physical characteristics can include the occupant's weight, size (e.g., height), and positioning relative to the air bag deployment origin. To retrieve all of this information, the sensing device **18** typically comprises a plurality of sensors, each capable of sensing one or more physical characteristics of the occupant. By way of example, the occupant's weight can be determined with pressure cells that are distributed within the occupant's seat. As for the occupant's size, a dash mounted infra-red sensor can be used to both detect the presence of the occupant and determine his or her physical size. Similarly, such a sensor can be used to determine the relative positioning between the air bag housing and the occupant.

As indicated in FIGS. 3 and 4, the restraining apparatus **12** preferably is arranged such that a substantially circular restraint pattern is formed (regardless of orientation of the bag's outer periphery). In the embodiment depicted in these figures, this circular restraint pattern is formed in a central portion of the air bag **22**. It is this portion of an air bag **22** that the head and neck of a child or a person of small stature would likely impact in a vehicular accident. Accordingly, this portion of the air bag **22** can be restrained so as to reduce deployment injuries to such an occupant. Furthermore, the circular pattern insures greater uniformity in forming the restraints area.

FIG. 5 depicts a second tether arrangement for restraining deployment of the air bag **22**. Similar to the restraining apparatus **12** depicted in FIGS. 1-4, the restraining apparatus **44** in this second tether arrangement comprises a plurality of tethers **20**. However, in the second arrangement, the tethers **20** do not extend outwardly from the inside of the air bag **22** to travel along the outer surface **40** of the occupant side **26** of the air bag. Instead, each of these tethers **20** is

5

secured to an inner surface **36** of the occupant side of the air bag **22** such that discrete points of the air bag can be controlled during deployment. Attachment of the tethers **20** to the air bag **22** can be accomplished by a variety of means. Preferably, however, each of these tethers **20** is fastened to the air bag **22** by way of gluing or stitching. With an arrangement such as that depicted in FIG. 5, the air bag control system **10** can be used to control not only the total extent of deployment of the air bag **22**, but further can be used to control the shape of the deployed air bag. As shown in FIG. 6, for instance, the individual tethers **20** can be retracted individually such that a top portion **46** of the bag cannot deploy as far as a bottom portion **48** of the bag. Controlled in this manner, the air bag **22** can assume a generally L-shaped configuration. Such a configuration may be desirable for use with an average height occupant who is relatively frail (e.g., light in weight). The head and neck of such occupants likely would impact this restrained top portion **46** of the air bag **22** so that potential injury from bag impact could be avoided.

FIG. 7 shows a third tether arrangement. As is illustrated by this figure, a single tether **50** can be strung between inflator side **24** and the occupant **26** of the air bag **22** in a geometrical pattern such that uniform adjustment of air bag deployment can be achieved by merely retracting the two ends **52** and **54** of the single tether **50**. By way of example, the tether **50** can be strung from point A, to B, to C, and so on to point I which is located proximate to point A. In such an arrangement, the tether **50** would extend along the outer surface **40** of the occupant side **26** of the air bag **22** in similar manner to the tethers **20** shown in FIGS. 1 through 4. In the particular arrangement shown in FIG. 7, the tether **50** runs along the exterior of the air bag **22** along lengths B, C and F, G. Unlike the restraining apparatus **12** shown in FIGS. 1 through 4, however, no coating is provided over top the tether **50** in that the portion of the tether extending outside of the air bag **22** will change as the tether is retracted by the extension/retraction device **14**.

FIG. 8 illustrates a fourth tether arrangement in which tethers **20** are stitched to the occupant side **26** of the air bag **22**. This arrangement provides the same effect as the coated embodiment shown in FIG. 3 and therefore prevents the shifting of the individual tethers **20** along the outer surface **40** of the air bag. In yet another tether arrangement shown in FIG. 9, individual tethers **20** extend through the occupant side **26** of the air bag **22** as in the embodiment of FIGS. 2-4, but are stitched to the occupant side in a different pattern to achieve the same objective, viz., to prevent the shifting of the individual tethers along the outer surface **40** of the air bag.

While preferred embodiments of the invention have been disclosed in detail in the foregoing description and drawings, it will be understood by those skilled in the art that variations and modifications thereof can be made without departing from the spirit and scope of the invention as set forth in the following claims. For instance, although the air bag control system disclosed herein is described as comprising a sensing device, it is to be understood that manual adjustment is feasible, for example through the use of an input device such as a switch. In addition, where no manual or automatic control is desired, the tethers **20** can be fixed at predetermined lengths that will regulate the extent of deployment. In such an embodiment, the sensing and control devices described herein would not be necessary.

What is claimed is:

1. An air bag control system, comprising:

a restraining apparatus adapted to be connected to an occupant side of an air bag;

6

an extension/retraction device used to adjust the degree to which said restraining apparatus can be extended; and a control device for controlling extension and retraction of said extension/retraction device;

wherein said restraining apparatus can be retracted by said extension/retraction device in response to a signal sent by said control device to limit the physical extent to which the air bag can deploy to prevent injury of a vehicle occupant adjacent the air bag.

2. The system of claim 1, wherein said restraining apparatus comprises a plurality of tethers that are adapted to individually connect to the air bag.

3. The system of claim 2, wherein said tethers comprise high tenacity fiber yarns.

4. The system of claim 2, wherein said tethers comprise high tenacity fiber straps.

5. The system of claim 2, wherein said tethers are adapted to be arranged in a substantially circular pattern on the air bag.

6. The system of claim 1, wherein said extension/retraction device comprises a motorized take-up mechanism.

7. The system of claim 6, wherein said mechanism is indexed so as to prevent inadvertent extension of said restraining device.

8. The system of claim 1, wherein said control device comprises a microprocessor.

9. The system of claim 1, further comprising a sensing device which senses at least one physical characteristic of the occupant to be cushioned by the air bag.

10. The system of claim 9, wherein said sensing device is adapted to determine the weight of the occupant.

11. The system of claim 9, wherein said sensing device is adapted to determine the size of the occupant.

12. The system of claim 9, wherein said sensing device is adapted to determine the position of the occupant with respect to the undeployed air bag.

13. An air bag system, comprising:

an air bag housing;

an air bag disposed in said air bag housing, said air bag having an inflator side and an occupant side;

a restraining apparatus connected to said occupant side of said air bag;

an extension/retraction device used to adjust the degree to which said restraining apparatus can be extended relative to said housing; and

a control device for controlling extension and retraction of said extension/retraction device;

wherein said restraining apparatus can be retracted by said extension/retraction device in response to a signal sent by said control device to limit the physical extent to which the air bag can deploy to prevent injury of a vehicle occupant adjacent the air bag.

14. The system of claim 13, wherein said restraining apparatus comprises a plurality of tethers that are individually connect to said air bag.

15. The system of claim 14, wherein said tethers comprise high tenacity fiber yarns.

16. The system of claim 14, wherein said tethers comprise high tenacity fiber straps.

17. The system of claim 14, wherein said tethers are arranged in a substantially circular pattern on said air bag.

18. The system of claim 13, wherein said extension/retraction device comprises a motorized take-up mechanism.

19. The system of claim 18, wherein said mechanism is indexed so as to prevent inadvertent extension of said restraining device.

7

20. The system of claim **13**, wherein said control device comprises a microprocessor.

21. The system of claim **13** further comprising a sensing device which senses at least one physical characteristic of the occupant to be cushioned by said air bag.

22. The system of claim **21**, wherein said sensing device is adapted to determine the weight of the occupant.

23. The system of claim **21**, wherein said sensing device is adapted to determine the size of the occupant.

24. The system of claim **21**, wherein said sensing device is adapted to determine the position of the occupant with respect to the undeployed air bag.

25. A method for limiting the extent to which an air bag can deploy from its housing to prevent injury of a vehicle occupant adjacent the air bag, said method comprising the steps of:

connecting an occupant side of the air bag to a restraining apparatus;

providing a control device for controlling operation of the restraining apparatus;

receiving a signal to retract the restraining apparatus sent by the control device; and

retracting the restraining apparatus in response to the signal sent by the control device to limit the degree to which the restraining apparatus can be extended relative to the housing to thereby limit the physical extent to which the air bag can be deployed.

8

26. The method of claim **25**, further comprising the step of sensing at least one physical characteristic of the occupant to be cushioned by the air bag and transmitting a signal from a sensing device to the control device.

27. The method of claim **26**, wherein the physical characteristic is the weight of the occupant.

28. The method of claim **26**, wherein the physical characteristic is the size of the occupant.

29. The method of claim **26**, wherein the physical characteristic is the position of the occupant with respect to the undeployed air bag.

30. An air bag control system, comprising:

a telescopic restraining device adapted to be connected to an occupant side of an air bag;

an extension/retraction device used to adjust the degree to which said telescopic restraining device can be extended; and

a control device for controlling extension and retraction of said extension/retraction device;

wherein said telescopic restraining device can be retracted by said extension/retraction device in response to a signal sent by said control device to limit the physical extent to which the air bag can deploy to prevent injury of a vehicle occupant adjacent the air bag.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,254,130 B1
DATED : July 3, 2001
INVENTOR(S) : Jayaraman et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 1,

Line 39, after "injuries", delete " ,"

Column 3,

Line 7, delete "yams" and replace with "yarns"

Column 6,

Lines 24, and 67, after "restraining", delete "device" and replace with "apparatus"

Signed and Sealed this

Eleventh Day of December, 2001

Attest:

Nicholas P. Godici

Attesting Officer

NICHOLAS P. GODICI
Acting Director of the United States Patent and Trademark Office